

**SERVICE MANUAL**

**MODEL 1084P MONITOR**

*includes 1084P-S SCHEMATIC*

**JULY, 1988**

**PN-314890-01**

 **commodore**  
COMPUTERS



**SERVICE MANUAL**

**MODEL 1084P MONITOR**

***includes 1084P-S SCHEMATIC***

**JULY, 1988**

**PN-314890-01**

**Commodore Business Machines, Inc.**

1200 Wilson Drive, West Chester, Pennsylvania 19380 U.S.A.

Commodore makes no express or implied warranties with regard to the information contained herein. The information is made available solely on an as is basis, and the entire risk as to completeness, reliability, and accuracy is with the user. Commodore shall not be liable for any damages in connection with the use of the information contained herein. The listing of any available replacement part herein does not constitute in any case a recommendation, warranty or guaranty as to quality or suitability of such replacement part. Reproduction or use without express permission, of editorial or pictorial content, in any matter is prohibited.

This manual contains copyrighted and proprietary information. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written permission of Commodore Electronics Limited.

Copyright © 1988 by Commodore Electronics Limited.  
All rights reserved.




## IMPORTANT SAFETY NOTICE

Proper service and repair is important to the safe, reliable operation of all NAPCEC Equipment. The service procedures recommended by NAPCEC and described in this service manual are effective methods of performing service operations. Some of these service operations require the use of tools specially designed for the purpose. The special tools should be used when and as recommended.

It is important to note that this manual contains various **CAUTIONS** and **NOTICES** which should be carefully read in order to minimize the risk of personal injury to service personnel. The possibility exists that improper service methods may damage the equipment. It also is important to understand that these **CAUTIONS** and **NOTICES ARE NOT EXHAUSTIVE**. NAPCEC could not possibly know, evaluate and advise the service trade of all conceivable ways in which service might be done or of the possible hazardous consequences of each way. Consequently, NAPCEC has not undertaken any such broad evaluation. Accordingly, a servicer who uses a service procedure or tool which is not recommended by NAPCEC must first satisfy himself thoroughly that neither his safety nor the safe operation of the equipment will be jeopardized by the service method selected.

### WARNING

Critical components having special safety characteristics are identified with an **S** by the Ref. No. in the parts list and enclosed within a broken line\* along with the safety symbol  on the schematics or exploded views.

Use of substitute replacement parts which do not have the same specified safety characteristics may create shock, fire, or other hazards.

Under no circumstances should the original design be modified or altered without written permission from the N.A.P. Consumer Electronics Corp. NAPCEC assumes no liability, express or implied, arising out of any unauthorized modification of design. Servicer assumes all liability.

\* Broken line: — . — . — . — .



## INDEX

Description	Page
Adjustment Procedures .....	4-7
CRT P.C. Board (component side view) .....	22
Interconnect Diagram .....	7
Interface P.C. Board (component side view) .....	14, 22
Main P.C. Board (component side view) .....	9, 17
Power Supply P.C. Board (component side view) .....	15, 16
Replacement Parts List .....	23-25
Safety Notes .....	2, 26
Schematic Diagram .....	11-13, 19-21
Schematic Notes .....	10, 18
Specifications .....	2
Waveforms .....	8

## SPECIFICATIONS

CRT size	13 inch diagonal
CRT Deflection Angle	90 degrees
CRT Mask Pitch:	
-8CM505/CM8505/CM8705	0.65mm
-8CM515/8CM542/CM8562/CM8762	0.42mm
-8CM643	0.39mm
CRT Light Transmission:	
-CM8505/CM8705	56%
-8CM505/8CM515/8CM643	46%
-8CM542/CM8562/CM8762	46%
Power Requirements	115Vac/60Hz
Power Consumption	75W max.
Degaussing	Automatic (when switching on set)
Video Input Signals:	
CM8505/CM8705/8CM505/8CM515/8CM643	
	RGB analog 0.7, composite sync,
	6 pin connector
Composite video	1Vp-p,
	negative sync, RCA connector
	RGB-1 TTL, separate horiz.
	and vert. sync,
	8 pin connector
Horizontal Scanning Frequency	15734Hz
Horizontal Frequency Drift	1 % max.
Horizontal Flyback Time	12µs max.
Horizontal Blanking Time	12µs max.
Vertical Scanning Frequency	47-62.5Hz
Vertical Frequency Drift	1% max.
Vertical Flyback Time	0.95mS max.
Vertical Blanking Time	(21H) 1.33mS
RGB Amp Bandwidth	8MHz min.
RGB Amp Bandwidth (8CM643)	15MHz min.
Resolution:	
-Vertical	240 lines
-CM8505/CM8705 Horizontal	390 dots
-8CM505 Horizontal	390 dots
-8CM515/CM8562 Horizontal	640 dots
-8CM542/8CM643	690 dots
Character Display:	
-CM8505/CM8705	1000 characters (40 x 25)
-8CM505	1600 characters (64 x 25)
-8CM515/8CM542/CM8562/CM8762/8CM643	
	2000 characters (80 x 25)
Overshoot/Undershoot	5% max.
Black Level Shift	3% max.
Audio Input Signal	150mV eff.
Audio Input Impedance	10k
Audio Output Power	1W a 5% distortion
Audio Frequency Range	300Hz - 7kHz
Audio S/N Ratio	40dB min.
Operating Humidity Range	less than 80%
Dimensions (HxWxD)	320x350x387mm

\* Specifications subject to change without notice.



## ADJUSTMENT PROCEDURES

### Adjustment Notes: unless otherwise specified:

1. An isolation transformer must be used when servicing this unit.
2. Line voltage maintained at 120Vac, 60Hz.
3. The unit should be allowed to warm up for at least 30 minutes prior to making any adjustments.
4. Voltages measured with respect to ground.
5. Signal injection point is the Video In Jack.

### R496 Pincushion Adjustment (8CM643 only)

1. Inject a cross-hatch pattern and set Brightness Control (R598) and Contrast Control (R585) to their mechanical centers.
2. Adjust R496 so that 14 blocks correspond to a width of 26cm.
3. Horizontal Amplitude and Centering Adjustment
4. Vertical Amplitude and Centering Adjustment

### R598 Sub-Brightness Control Adjustment (8CM643 only)

#### (Dual Trace Oscilloscope required)

1. Inject a signal with a white raster to input connector.
2. Adjust G2 (R727) and Contrast Control to minimum. Adjust Brightness Control to mechanical center.
3. Connect a DC coupled probe from Channel A of the oscilloscope to pin 1 of IC502.
4. Connect a DC coupled probe from Channel B of the oscilloscope to the emitter of TS641.
5. Adjust the Sub-Brightness (R598) to place the top of the video Signal (Channel A) at the same voltage level as the emitter of TS641 (Channel B).
6. Adjust Red (R705), Green (R705) and Blue (R706) cut off controls to set pins 6, 8, and 11 of Picture Tube at 100 volts each.
7. Advance G2 control (R727) until screen just begins to illuminate.
8. If the electron guns of the CRT are balanced, you should get a dull gray raster. However, if one color is more predominant than the others, adjust the cut-off controls of other 2 corresponding guns as required to obtain a gray raster.

### Power Supply Adjustment

1. With the unit off, set the Volume Control (R316), Contrast Control (R585), and Brightness Control (R589) to minimum.
2. Preset R114 to mechanical center.
3. Connect a voltmeter across C494 and turn on the unit.
4. Adjust R114 for a reading of 125V on the meter.

### Horizontal Synchronization Adjustment

1. Inject a cross-hatch pattern signal and short C434.
2. Adjust the horizontal sync with R437.
3. Remove the short from C434.

### Vertical Synchronization Adjustment

1. Inject a cross-hatch pattern signal and short C434.
2. Adjust the vertical sync with R331.
3. Remove the short C434.

### Horizontal Amplitude and Centering Adjustment

1. Inject a cross-hatch pattern signal and set the Brightness Control (R589) and Contrast Control (R585) to their mechanical centers.
2. Adjust R485 so that 14 blocks correspond to a width of 26cm.
3. Adjust R453 to center display horizontally.

### Vertical Amplitude and Centering Adjustment

1. Inject a cross-hatch pattern and set the Brightness Control (R585) to their mechanical centers.
2. Adjust R353 so that 10 blocks correspond to a height of 18.5cm.
3. Adjust R364 to center the display vertically.

### Chrominance Adjustment

(Note: pin nos. in parenthesis indicate alternate 16-pin IC.)

1. Inject a color bar pattern signal and adjust the secondary controls for normal viewing. Place SK3 (not used in CM8562, CM8762, 8CM542) in the off position.
2. Connect an oscilloscope to pin 15 of IC502 and adjust S533 for minimum amplitude of the chrominance signal that is present on the various brightness steps of the luminance signal.
3. Short pins 9 (3) and 17 (11) of IC501.
4. Adjust C567 to minimize the chroma as visible on the screen.
5. Remove the shorting clips from pins.

### Comb Filter Adjustment

(CM8505/CM8705/8CM505/8CM515/8CM643 ONLY)

1. Inject a color bar pattern signal and place the Comb Filter Switch (SK3 in the on position).
2. Connect an oscilloscope to the emitter of TS531 and adjust R523 and S515 for minimum amplitude of the chrominance signal. For optimum performance, repeat the adjustment.

### Focus Adjustment

1. Inject a cross-hatch pattern signal and set the Brightness Control (R589) to minimum and the Contrast control (R585) to maximum.
2. Adjust R732 for optimum focus.

### X-Ray Protection Circuit Adjustment

1. Inject a color bar pattern signal and set the Brightness and Contrast Controls to minimum.
2. Connect a voltmeter between the wiper of R457 and ground.
3. Adjust R457 for a reading of 6.9V.

Note: The following adjustments need only be performed if the CRT has been replaced. Minor corrections for purity and convergence may be accomplished through the use of the Purity and Convergence Assembly located on the neck of the CRT.

### Color Purity Adjustment (Refer to Figure 1)

1. Loosen the yoke clamp screw and slide the yoke back away from the rubber wedges.
2. Remove the rubber wedges (G) and slide the yoke forward until it rests firmly against the bell of the CRT.
3. Tighten the yoke clamp screw slightly so that the yoke can still be moved with some friction.
4. Place the multi-pole Purity and Convergence Assembly in the position shown in Figure 1.
5. Tighten screw (A) and turn securing ring (B) counter-clockwise. Position the unit so that it faces in an East/West direction and degauss the instrument.
6. Turn on the power and inject a cross-hatch pattern signal. Allow a 10 minute warm-up period.
7. Roughly adjust the static convergence, using tabs C and D.
8. Set the Vertical Centering Control (R364) to its mechanical center. Disconnect R723 and R724 to turn off the green and blue guns.



## ADJUSTMENT PROCEDURES (Continued)

9. Adjust the two-pole purity rings (E) to center the red vertical and horizontal lines.
10. Inject a white pattern signal and move the deflection yoke to obtain a full red raster.
11. Turn on the green and blue guns by reconnecting R723 and R724. If a uniformly white raster does not appear, minor adjustments may be made by adjusting the purity rings (E).
12. Inject a cross-hatch pattern signal to ensure that the yoke is not tilted. If necessary, rotate the yoke to obtain a level raster.
13. Tighten screw F and adjust R364 for proper vertical centering. Proceed to the Static Convergence Adjustment.

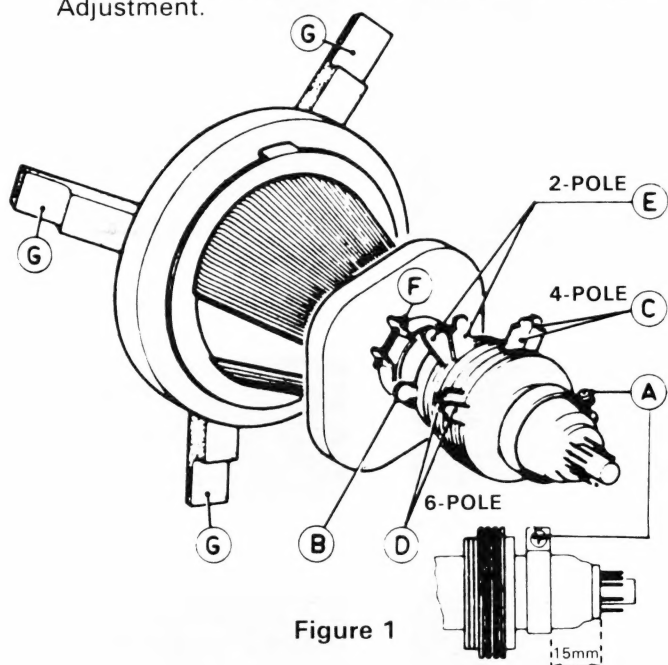


Figure 1

**Static Convergence Adjustment**

1. Inject a crosshatch pattern signal and allow a 10 minute warm-up period.
2. Turn off the green gun by disconnecting R723. Turn locking ring (B) counterclockwise.
3. Slowly spread, and if necessary, rotate the 4-pole magnetic rings (C) to converge red and blue lines at the center of the screen.
4. Reconnect R723 to turn on the green gun and disconnect R724 to turn off the blue gun.
5. Slowly spread, and if necessary, rotate the 6-pole magnetic rings (D) to converge the red and green lines at the center of the screen.
6. Reconnect R724 to turn on the blue gun.
7. For optimum performance, repeat steps 1 through 6. Proceed to the Dynamic Convergence Adjustment.

**Dynamic Convergence Adjustment**

1. Inject a cross-hatch pattern signal and turn off the green gun by disconnecting R723.
2. Tilt the yoke up and down to achieve the best convergence of the red and blue vertical lines at the 6 and 12 o'clock and the red and blue horizontal lines at the 3 and 9 o'clock positions (see Figure 2).
3. When the correct position has been found, place a rubber wedge between the CRT. If the yoke is tilted up, place wedge 1 as shown in Figure 3a; if it is tilted down, place wedge 1 as shown in Figure 4a.
4. Tilt the yoke to the left and right to find the point of best possible convergence of the red and blue lines

at the edges, top, and bottom of the screen as shown in Figure 5.

5. When the correct position is located, place wedges 2 and 3 as shown in Figure 3b or 4b.
6. Remove wedge 1 and place it in the final position as shown in Figure 3c or 4c. Reconnect resistor R723 to turn on the green gun.

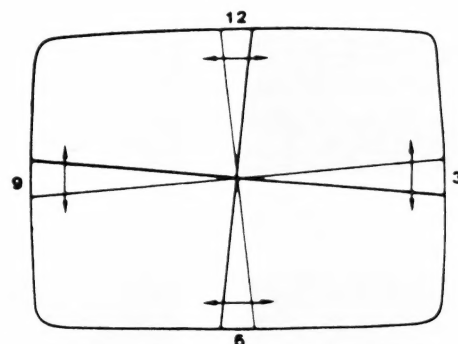


Figure 2 — Tilt yoke up or down to converge Red and Blue vertical lines at 6 and 12 o'clock positions, and Blue horizontal lines at 3 and 9 o'clock positions.

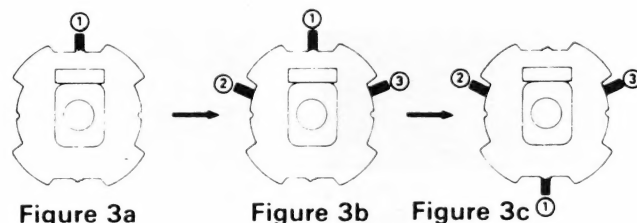


Figure 3a

Figure 3b

Figure 3c

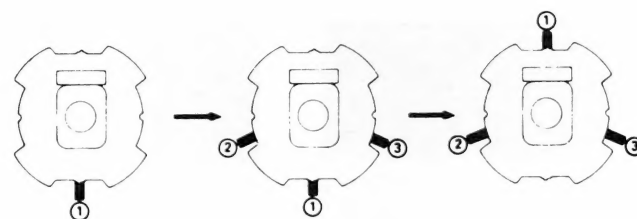


Figure 4a

Figure 4b

Figure 4c

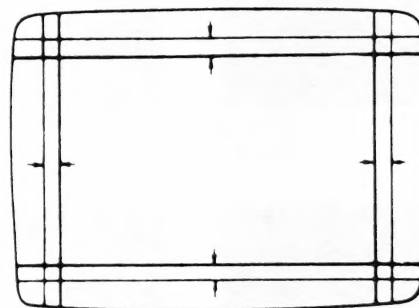


Figure 5 - Tilt yoke left or right to converge Red and Blue horizontal lines at the 6 and 12 o'clock positions, and Red and Blue vertical lines at the 3 and 9 o'clock positions.

**Note:** A computer delivering RGB TTL output (IBM or Apple) should be used to properly test the RGB circuitry. However, if a computer is not available, the following procedure may be used.

**EXCEPTION:** CM8562/CM8762/8CM542 does not accept Analog RGB or X-RGB signals.



## ADJUSTMENT PROCEDURES (Continued)

**RGB INTERFACE P.C. BOARD CHECKS FOR ALL MODELS (Except CM8562/CM8762/8CM542)**

Late Production RGB Interface models are IBM Compatible only after Feb. 87.

Early Production models accept Apple (X-RGB) or IBM (RGB-I) prior to Feb. 2, 1987.

The purpose of this board is to accept RGB TTL signal inputs (RGB-I or X-RGB) and develop the R, G, and B signals in the monitor. By grounding the control input (Pin 1 of 8 pin Din Plug) the interface circuit will decode X-RGB to equal RGB-I signals in the monitor.

**Interface P.C. Board Check**

1. If either Apple (X-RGB) or IBM (RGB-I) signals are available as a TTL input the interface operation in the other signal mode may be checked. By grounding the control input on each color the other mode will appear. Pins 2, 3, 4, and 5 the 8 Pin Din Jack are high level when open. Use the cross reference chart for this cross color check.
2. To confirm proper operation of the RGB Interface Board, refer to the following truth table and ground the pins as shown. A voltmeter may be used to determine whether the output levels are high (1) or low (0). (Refer to schematic for pin nos.).
3. Another quick check may be done using a sine or square wave generator. A 1 to 3 kHz square wave (2Vp-p) may be injected into the pins of the DIN jack in the truth table. Color flashes should be visible on the screen which correspond to the pin or pins connected to the signal generator. Pin 2 should give red flashes, pin 3 green flashes, etc. when in the IBM mode. The colors will vary when pin 1 is grounded along with any of the others because the Apple colors are not the same as the IBM colors.

**IBM TRUTH TABLE**

INPUTS					OUTPUTS										
DIN PLUG PINS					IC272 PINS									IC271 PINS	
(I)	(B)	(G)	(R)	*	1	2	3	4	5	6	7	9	11	13	
5	4	3	2	1											
0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	
0	0	0	1	1	1	1	1	0	0	0	0	0	0	0	
0	0	1	0	1	0	0	0	1	1	1	0	0	0	1	
0	0	1	1	1	1	1	1	0	1	0	0	0	0	1	
0	1	0	0	1	0	0	0	0	0	0	1	1	1	0	
0	1	0	1	1	1	1	1	0	0	0	1	1	1	0	
0	1	1	0	1	0	0	0	1	1	1	1	1	1	1	
0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
1	0	0	0	1	0	0	0	0	0	0	0	0	0	0	
1	0	0	1	1	1	1	1	0	0	0	0	0	0	0	
1	0	1	0	1	0	0	0	1	1	1	0	0	0	1	
1	0	1	1	1	1	1	1	1	1	1	0	0	0	1	
1	1	0	0	1	0	0	0	0	0	0	1	1	1	0	
1	1	0	1	1	1	1	1	0	0	0	1	1	1	0	
1	1	1	0	1	0	0	0	1	1	1	1	1	1	1	
1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	

**APPLE TRUTH TABLE**

INPUTS					OUTPUTS										
DIN PLUG PINS					IC272 PINS									IC271 PINS	
(I)	(B)	(G)	(R)	*											
5	4	3	2	1	1	2	3	4	5	6	7	9	11	13	
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
0	0	0	1	0	1	0	0	1	0	0	1	0	0	0	
0	0	1	0	0	0	1	0	0	0	0	0	1	0	1	
0	0	1	1	0	1	1	0	1	0	0	1	1	0	1	
0	1	0	0	0	0	0	0	0	1	0	0	0	1	0	
0	1	0	1	0	1	0	0	1	1	0	1	0	1	0	
0	1	1	0	0	0	1	0	0	1	0	0	1	1	1	
0	1	1	1	0	1	1	0	1	1	0	1	1	1	1	
1	0	0	0	0	0	0	1	0	0	1	0	0	0	0	
1	0	0	1	0	1	0	1	1	0	1	1	0	0	0	
1	0	1	0	0	0	1	1	0	0	1	0	1	0	1	
1	0	1	1	0	1	1	1	1	0	1	1	1	0	1	
1	1	0	0	0	0	0	1	0	1	1	0	0	1	0	
1	1	0	1	0	1	0	1	1	1	1	1	0	1	0	
1	1	1	0	0	0	1	1	0	1	1	0	1	1	1	
1	1	1	1	0	1	1	1	1	1	1	1	1	1	1	

\* IBM/APPLE switching line. (open=IBM; ground=APPLE)

**RGB-TTL INPUTS (8 PIN DIN)****Color Decoding Chart**

Levels shown are with monitor driven by computer.

	Pin				
APPLE X-RGB	5	4	3	2	IBM RGB-I
BLACK	0	0	0	0	BLACK
MAGENTA	0	0	0	1	RED
DARK BLUE	0	0	1	0	GREEN
PURPLE	0	0	1	1	BROWN
DARK GREEN	0	1	0	0	BLUE
GREY 1	0	1	0	1	MAGENTA
MIDDLE BLUE	0	1	1	0	CYAN
LIGHT BLUE	0	1	1	1	WHITE
BROWN	1	0	0	0	GREY
ORANGE	1	0	0	1	LIGHT RED
GREY 2	1	0	1	0	LIGHT GREEN
PINK	1	0	1	1	LIGHT YELLOW
GREEN	1	1	0	0	LIGHT BLUE
YELLOW	1	1	0	1	LIGHT MAGENTA
AQUA	1	1	1	0	LIGHT CYAN
WHITE	1	1	1	1	INTENSIFIED WHITE

**TTL Levels**

Low (0) = Zero to .8 volts

High (1) = 2.4 to 5 volts

Pin 1 is Apple/IBM Control Line

Low (0) = Apple, High (1) = IBM Colors

Apple is a registered trademark of Apple Computers

IBM is a registered trademark of International Business Machines





ADJUSTMENT PROCEDURES (Continued)

RGB 8 and 6 Pin DIN Sockets

PIN ASSIGNMENTS

PIN NO.	TTL INPUT 8 PIN SIGNAL	ANALOG 6 PIN SIGNAL
*1	IBM Open/Apple Gnd.	Green
2	Red	Horiz. Sync
3	Green	Ground
4	Blue	Red
5	Intensity	Blue
6	Ground	Vert. Sync
7	Horiz. Sync	
8	Vert. Sync	




When using these sockets before connecting the equipment, place the RGB/Composite Switch in the RGB position.

**\*Not used in CM8562/CM8762/8CM542**






























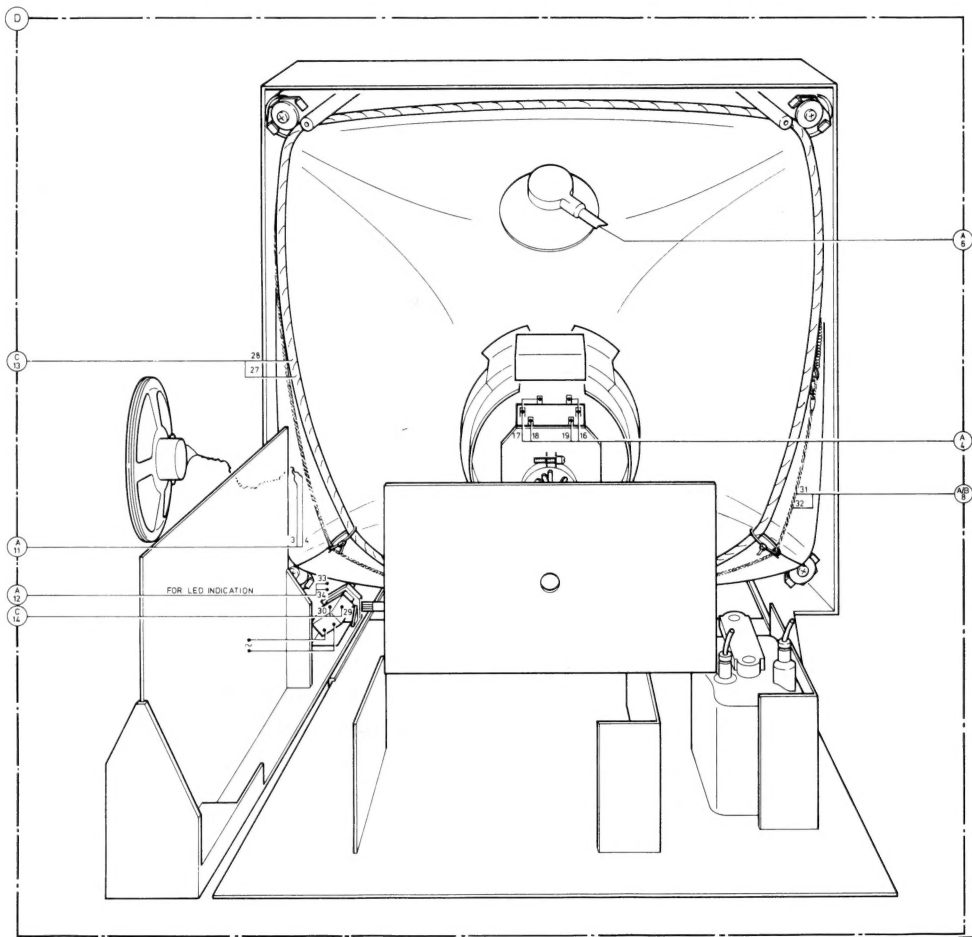
INTERCONNECT DIAGRAM

Note: To Remove Power Board Depress Locking Clip Located on Bottom of Cabinet Beneath Power Board.





## WAVEFORMS

1. .7Vp-p  
20 $\mu$ S2. .1Vp-p  
20 $\mu$ S3. .65Vp-p  
20 $\mu$ S4. .45Vp-p  
20 $\mu$ S5. .7Vp-p  
20 $\mu$ S6. 10.2Vp-p  
20 $\mu$ S7. .25Vp-p  
20 $\mu$ S8. 2.5Vp-p  
20 $\mu$ S9. 1.4Vp-p  
20 $\mu$ S10. 1.75Vp-p  
20 $\mu$ S11. .8Vp-p  
20 $\mu$ S12. 3.2Vp-p  
20 $\mu$ S13. 1.7Vp-p  
20 $\mu$ S14. 5.8Vp-p  
20 $\mu$ S15. 10.3Vp-p  
20 $\mu$ S16. 10.2Vp-p  
5mS17. 48Vp-p  
20 $\mu$ S18. 11.5Vp-p  
20 $\mu$ S19. 19Vp-p  
5mS20. 11Vp-p  
5mS21. 2Vp-p  
5mS22. 11.3Vp-p  
5mS23. 24Vp-p  
5mS24. 1.9Vp-p  
5mS25. 47Vp-p  
5mS26. 4Vp-p  
5mS27. 100Vp-p  
20 $\mu$ S28. 65Vp-p  
20 $\mu$ S29. 44Vp-p  
20 $\mu$ S30. 64Vp-p  
20 $\mu$ SWAVEFORM NOTES  
UNLESS OTHERWISE SPECIFIED:


1. WAVEFORMS TAKEN UNDER THE CONDITIONS SPECIFIED THE SCHEMATIC NOTES.
2. SWEEP/TIME CM SETTINGS ARE SHOWN JUST BELOW PHOTOS. ALL PHOTOS WERE TAKEN WITH THE SWEEP TIME CONTROLS IN THE CALIBRATED POSITION. HORIZONTAL POSITIONING OF THE WAVEFORMS WAS ADJUSTED FOR MAXIMUM CLARITY.







# INTERFACE SCHEMATIC DIAGRAM (Late Production Version)

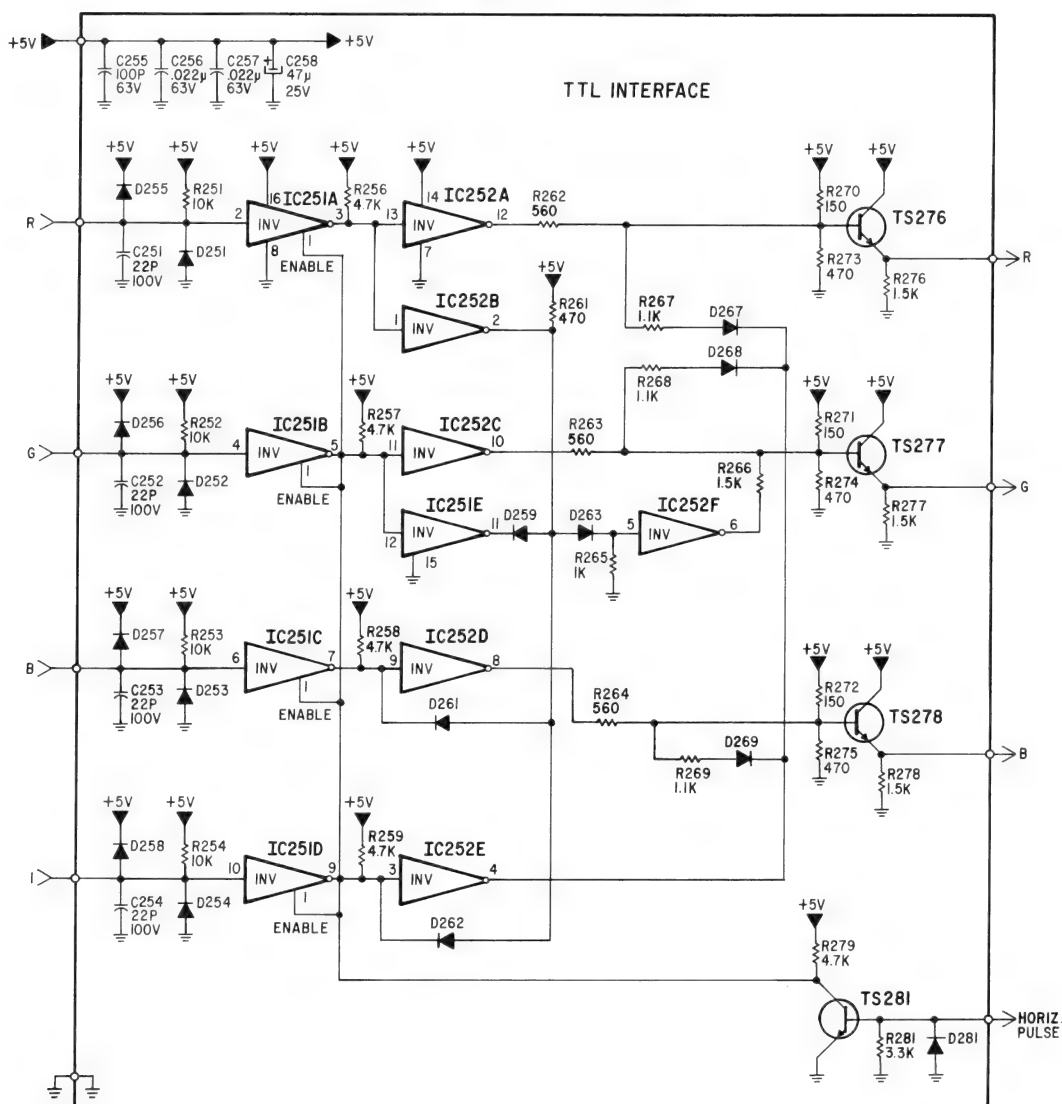


## SCHEMATICS NOTES: UNLESS OTHERWISE SPECIFIED:

- ALL VOLTAGES AND WAVEFORMS TAKEN UNDER THE FOLLOWING CONDITIONS:  
- LINE VOLTAGE MAINTAINED AT 120VAC, 60Hz VIA AN ISOLATION TRANSFORMER.  
CUSTOMER CONTROLS SET AS FOLLOWS:  
- VOLUME CONTROL (R316) SET TO MINIMUM.  
- COLOR CONTROL (R581) SET FOR 8.75VDC WIPER TO GROUND.  
- CONTRAST CONTROL (R585) SET FOR 8.7VDC WIPER TO GROUND.  
- BRIGHTNESS CONTROL (R589) SET FOR 5VDC WIPER TO GROUND.  
- HUE CONTROL (R565) SET FOR 6VDC WIPER TO GROUND.  
- SK2 IN CVBS POSITION.  
- SK3, SK4 & SK5 OFF.

E.P. REFERS TO EARLY PRODUCTION  
L.P. REFERS TO LATE PRODUCTION

- VOLTAGES AND WAVEFORMS WERE TAKEN USING A 10 BAR GATED RAINBOW PATTERN SIGNAL SET TO DELIVER CHROMA BARS OF .5Vp-p AT THE VIDEO IN JACK.
- ALL VOLTAGES ARE POSITIVE DC WITH RESPECT TO GROUND, BE IT THE ISOLATED (SIGNAL) GROUND OR THE AC (HOT) GROUND WHICHEVER IS PRESENT IN THAT AREA OF CIRCUITRY.
- VOLTAGES MAY VARY DUE TO NORMAL PRODUCTION TOLERANCES. VOLTAGE SOURCES ARE ALSO NOMINAL.
- RESISTORS ARE ALL 5%, 1/4W, CARBON FILM EXCEPT FOR SOME UNIQUE PARTS. REFER TO REPLACEMENT PARTS LIST.
- CAPACITOR VALUES ARE IN MICROFARADS & PICO FARADS. REFER TO SCHEMATIC DIAGRAM FOR VALUES AND VOLTAGES EXCEPT FOR UNIQUE PARTS SHOWN IN REPLACEMENT PARTS LIST.

## WARNING

Critical components having special safety characteristics are identified with an **S** by the Ref. No. in the parts list and enclosed within a broken line\* along with the safety symbol  on the schematics or exploded views.


Use of substitute replacement parts which do not have the same specified safety characteristics may create shock, fire, or other hazards.

Under no circumstances should the original design be modified or altered without written permission from the N.A.P. Consumer Electronics Corp. NAPCEC assumes no liability, express or implied, arising out of any unauthorized modification of design. Servicer assumes all liability.

\* Broken line: — . — . — . — . — . — .




 INDICATES "HOT" GROUND.  
 INDICATES ISOLATED SIGNAL GROUND.





**NOTE: IC501 Alternate 16 Pin IC, see Insert page 18**

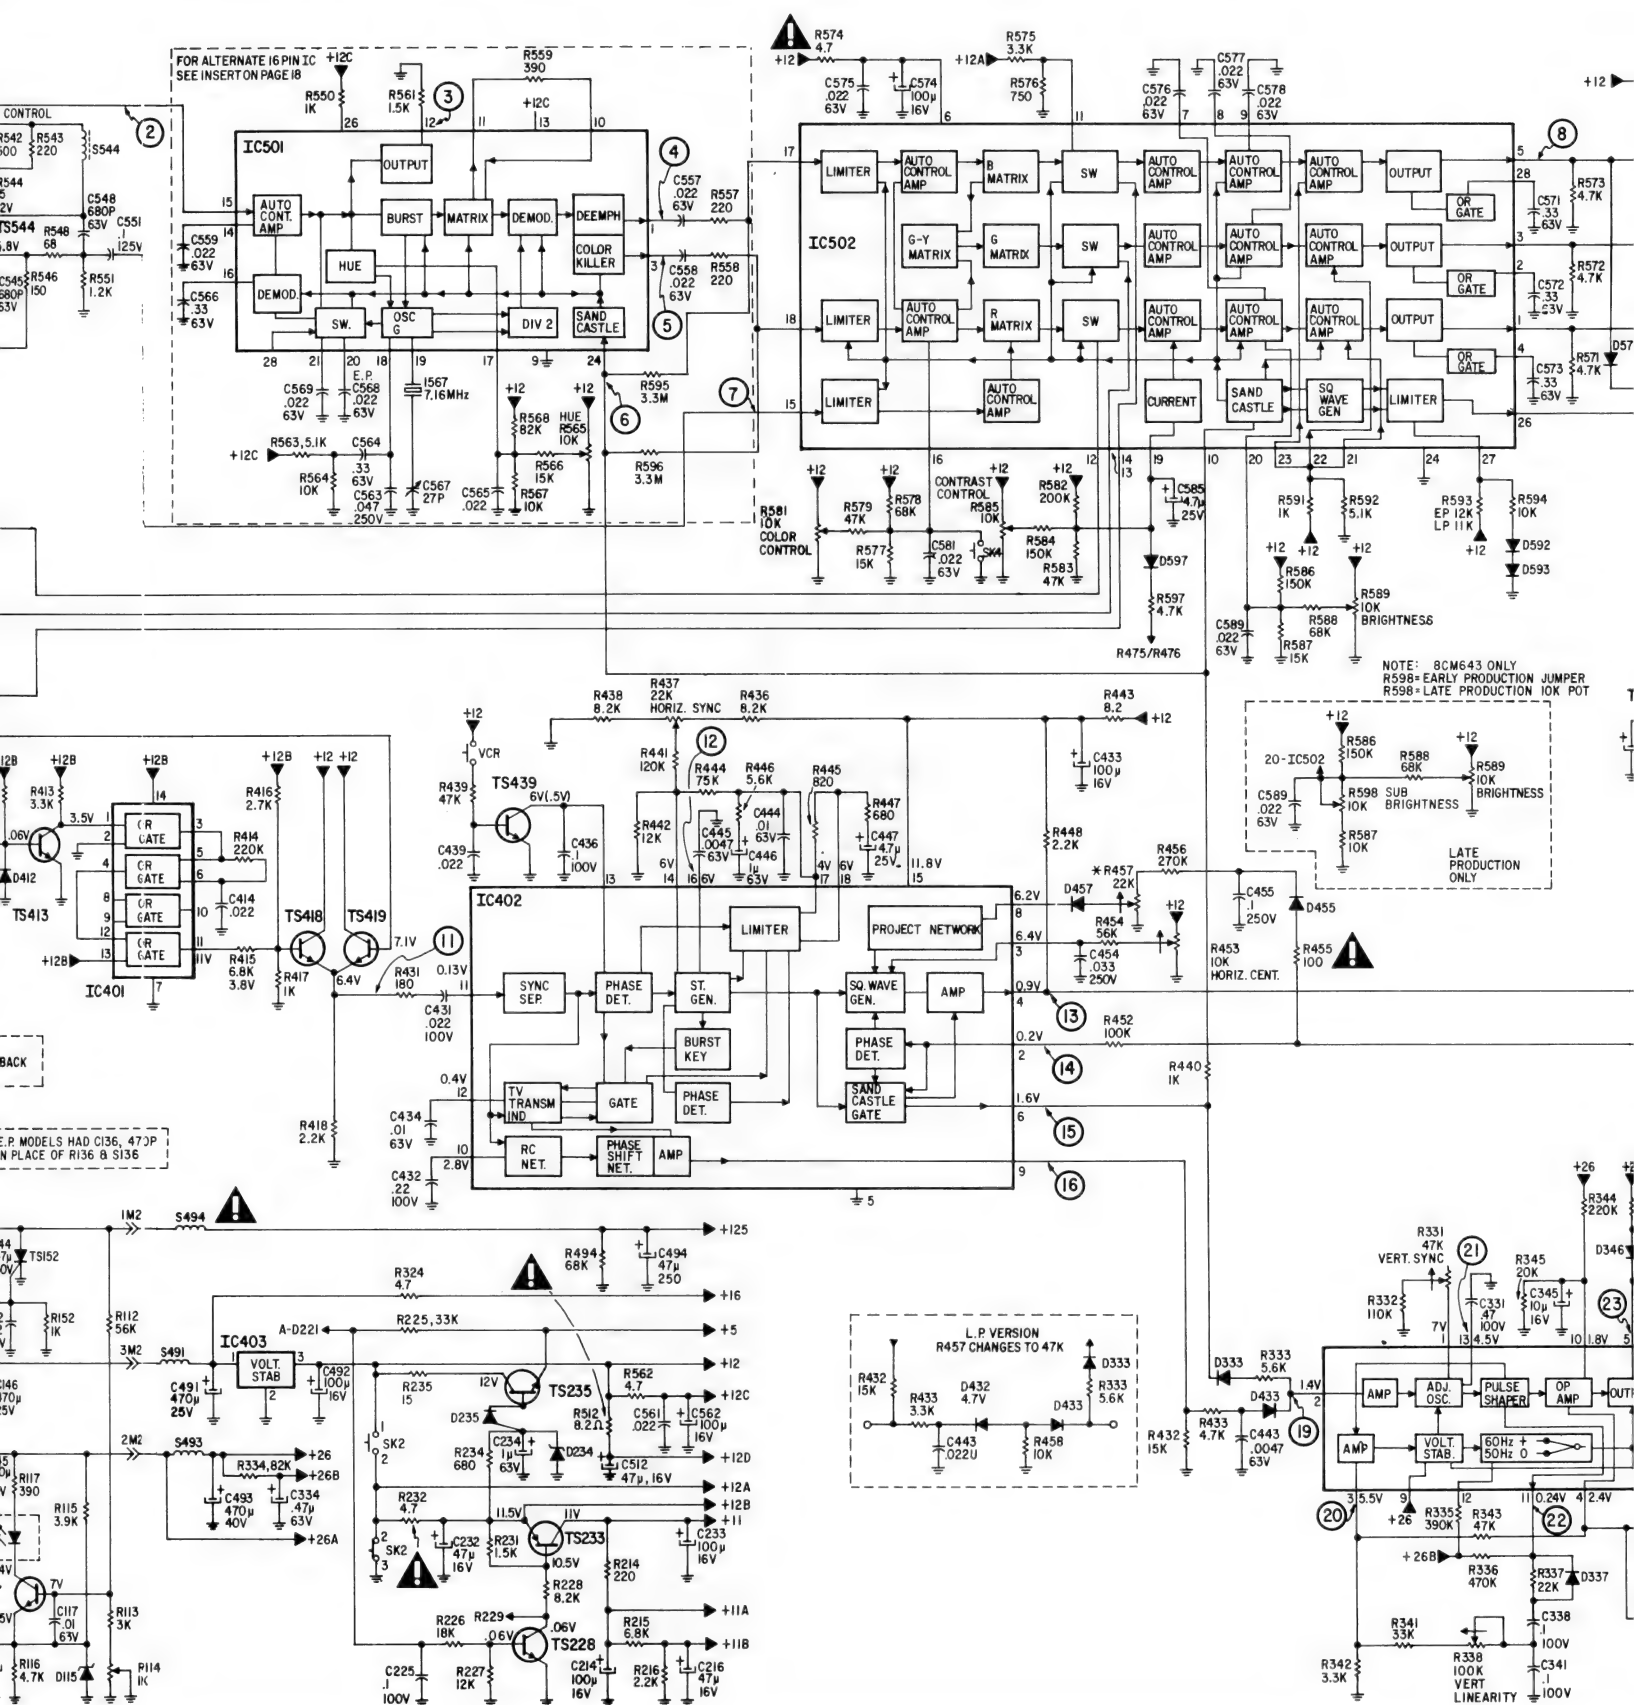**ROUND.**




**NAP 6523**



ONLY  
DUCTION JUMPER  
DUCTION IOK POT


R589  
OK  
BRIGHTNESS

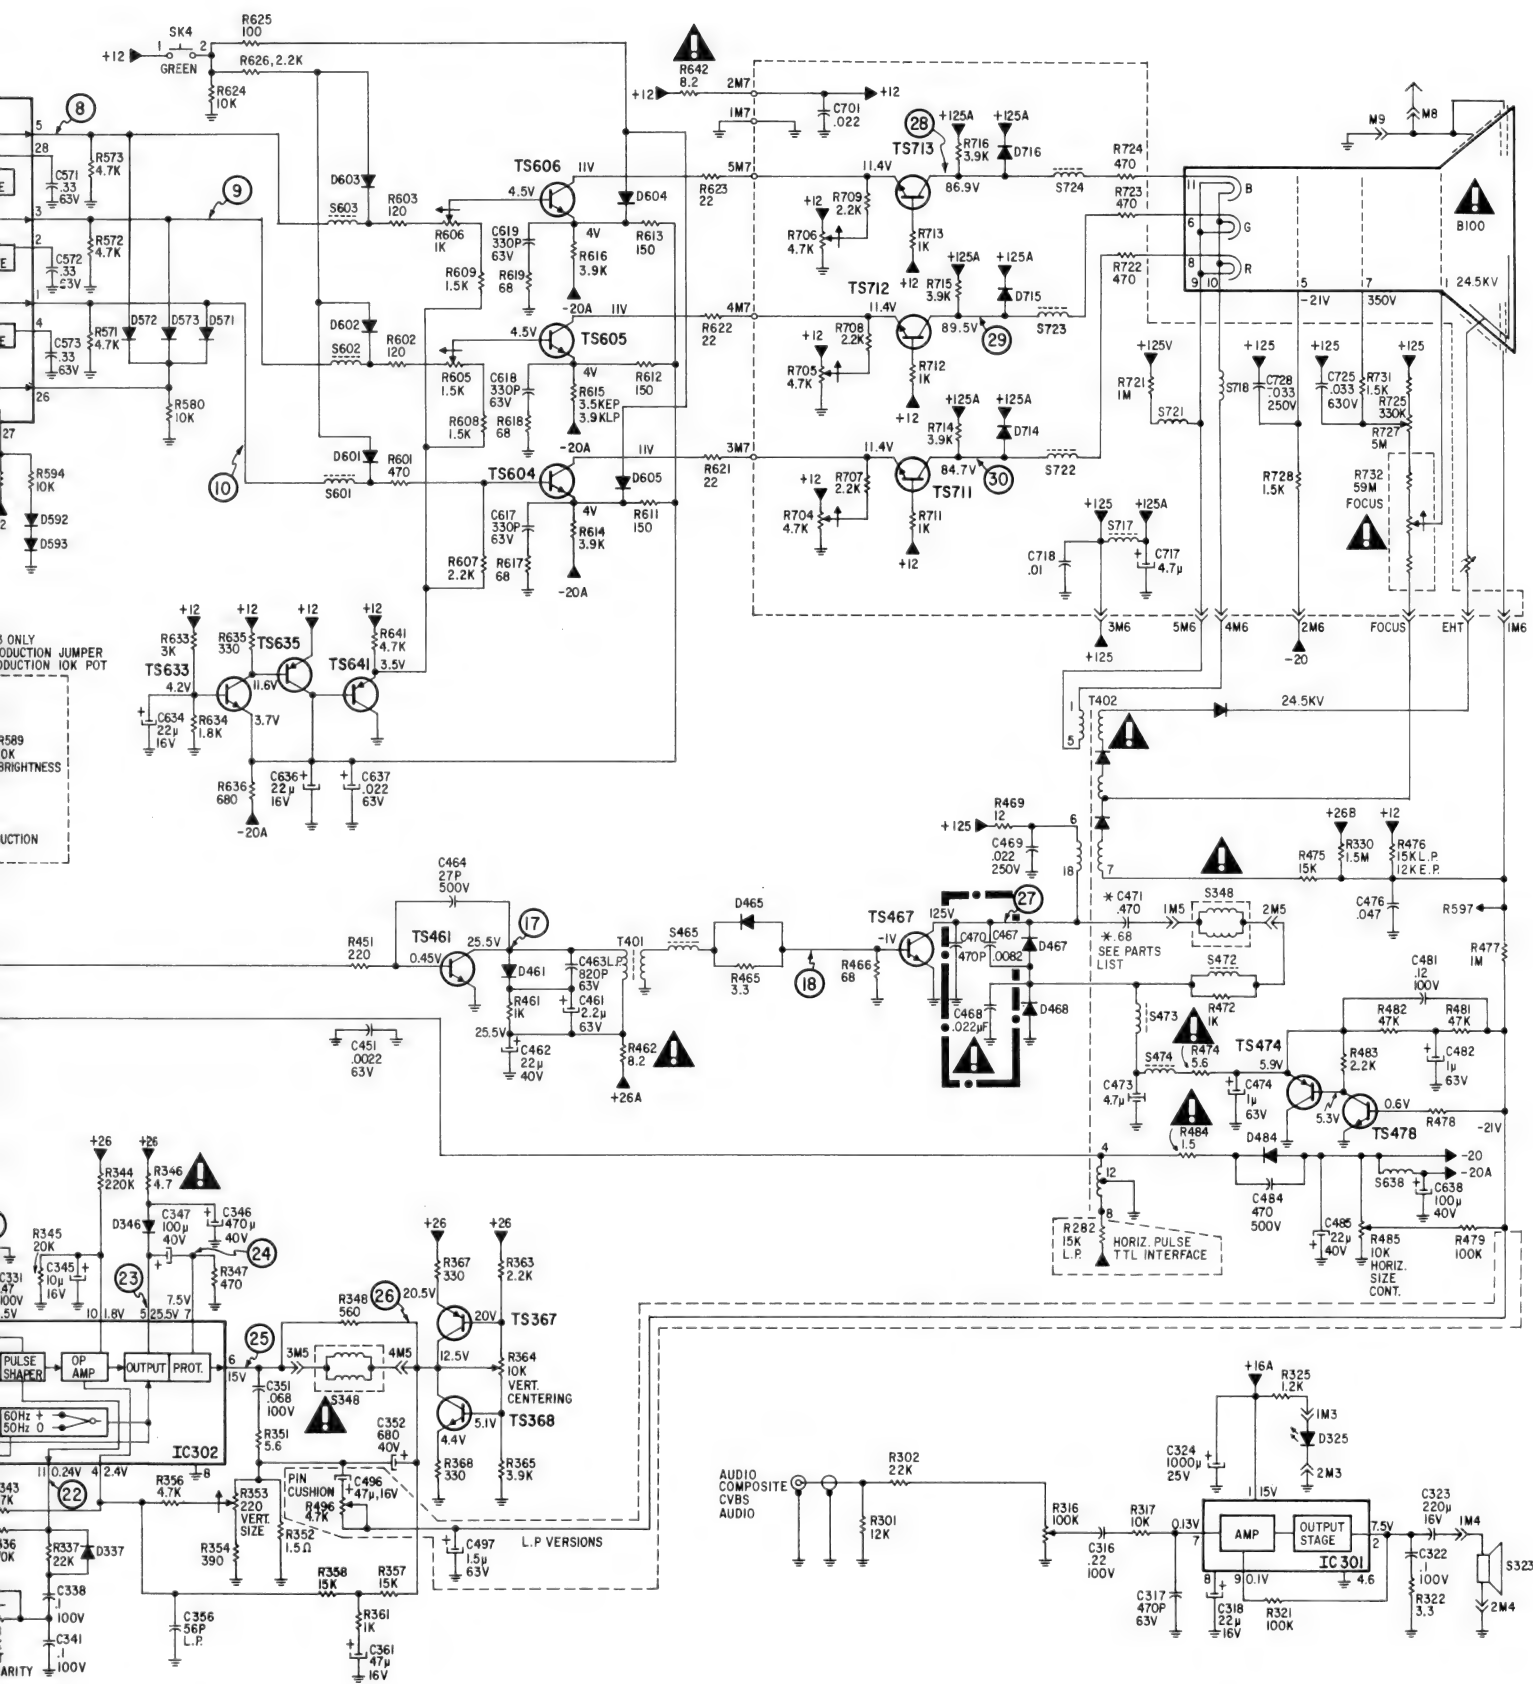DUCTION






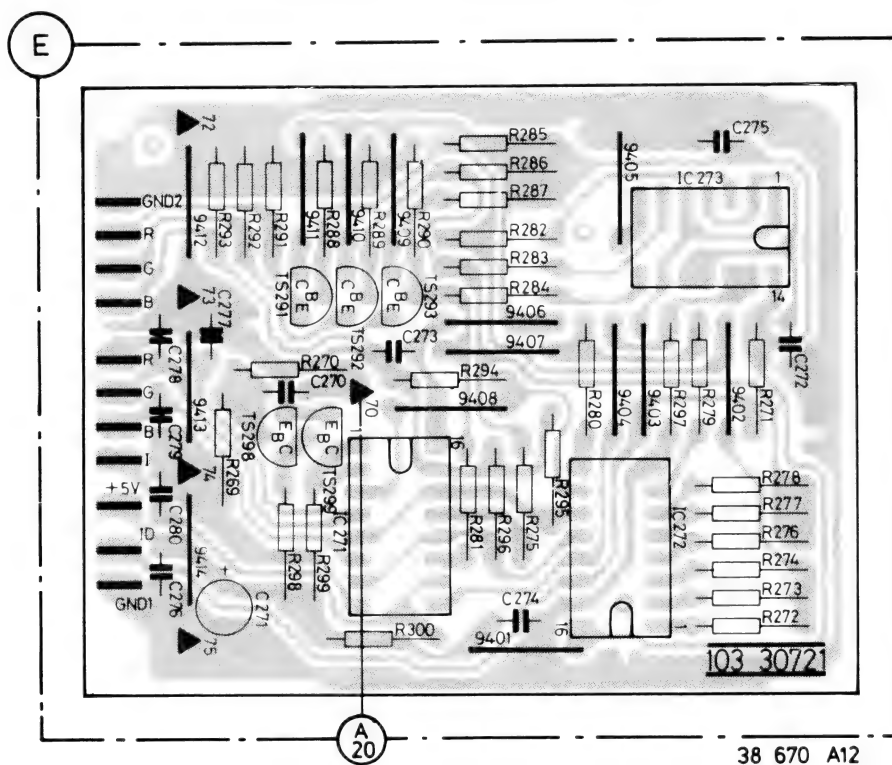**8CM505/8CM515/8CM643/CM8505/CM8705 RGB INTERFACE P.C. BOARD**  
 (Early Production Version)  
 (viewed from component side)




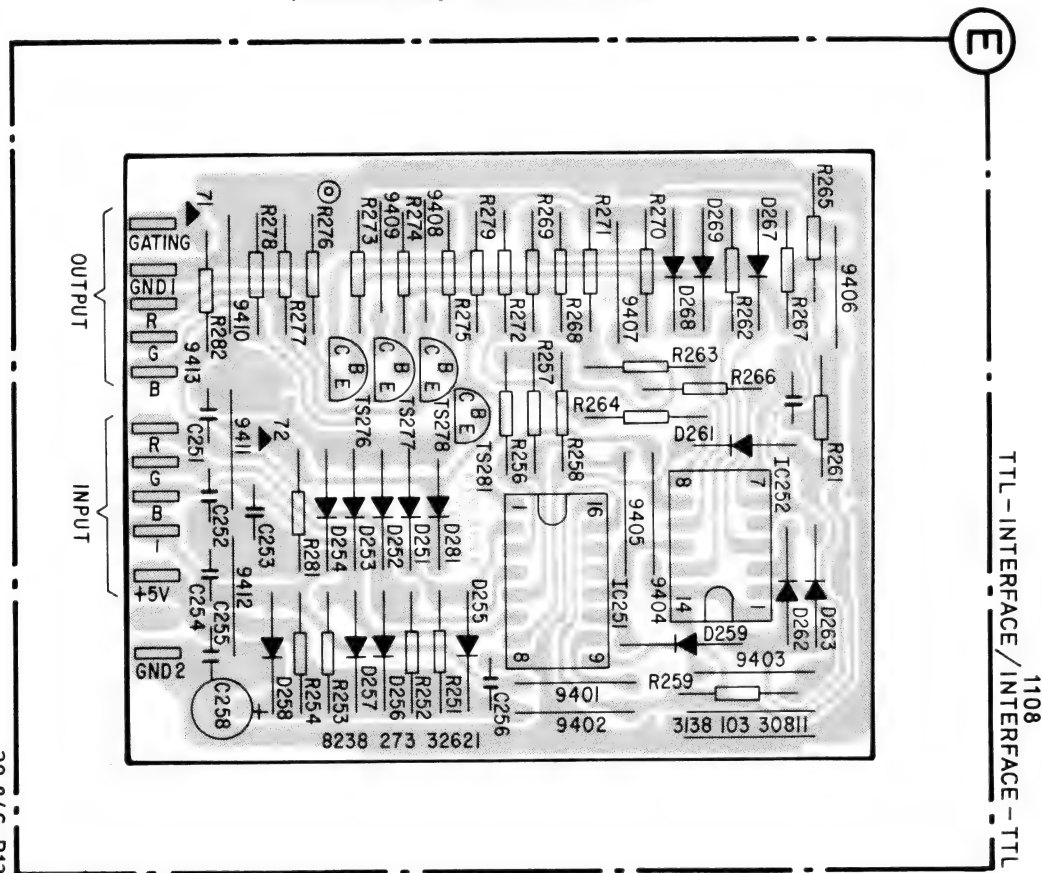**INTERFACE P.C. BOARD**  
 (Late Production Versions)  
 (viewed from component side)






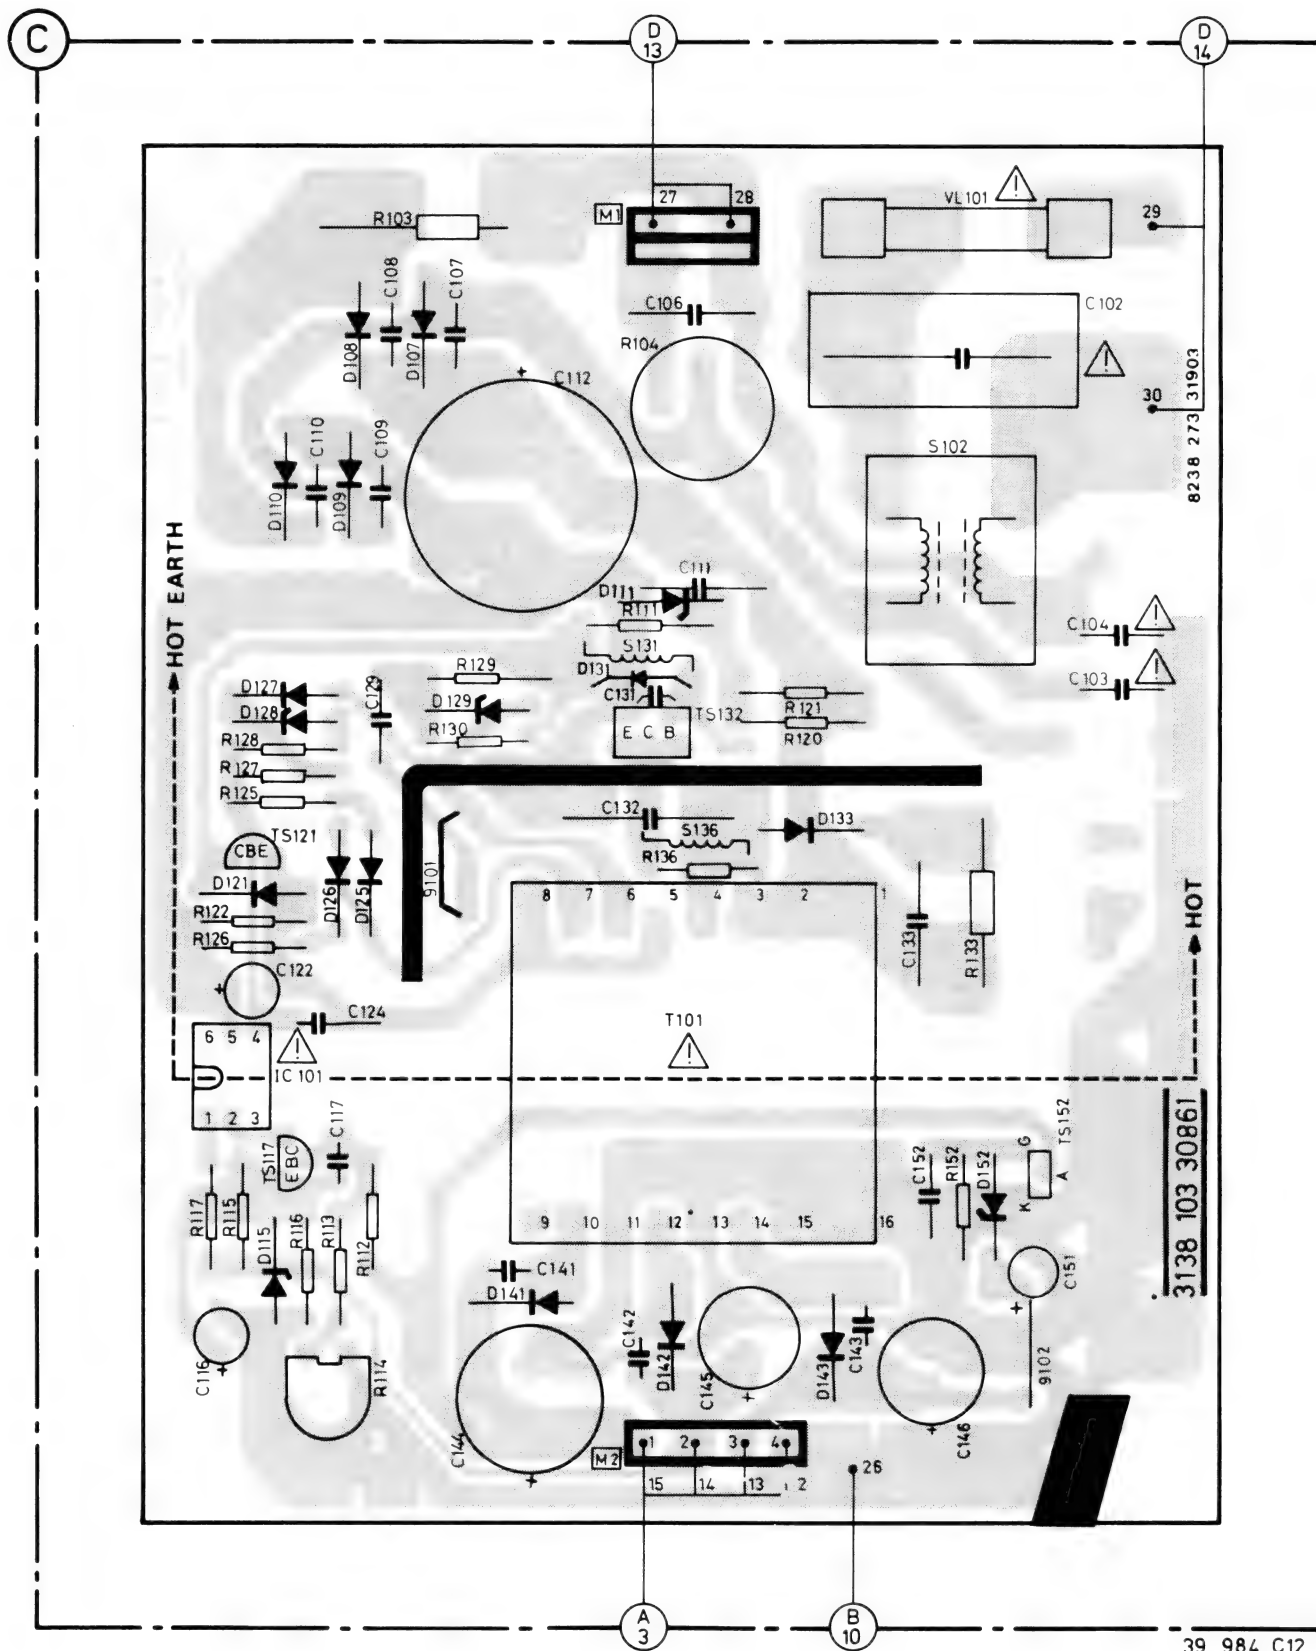**POWER SUPPLY P.C. BOARD (Late Production Version)**  
(viewed from component side)





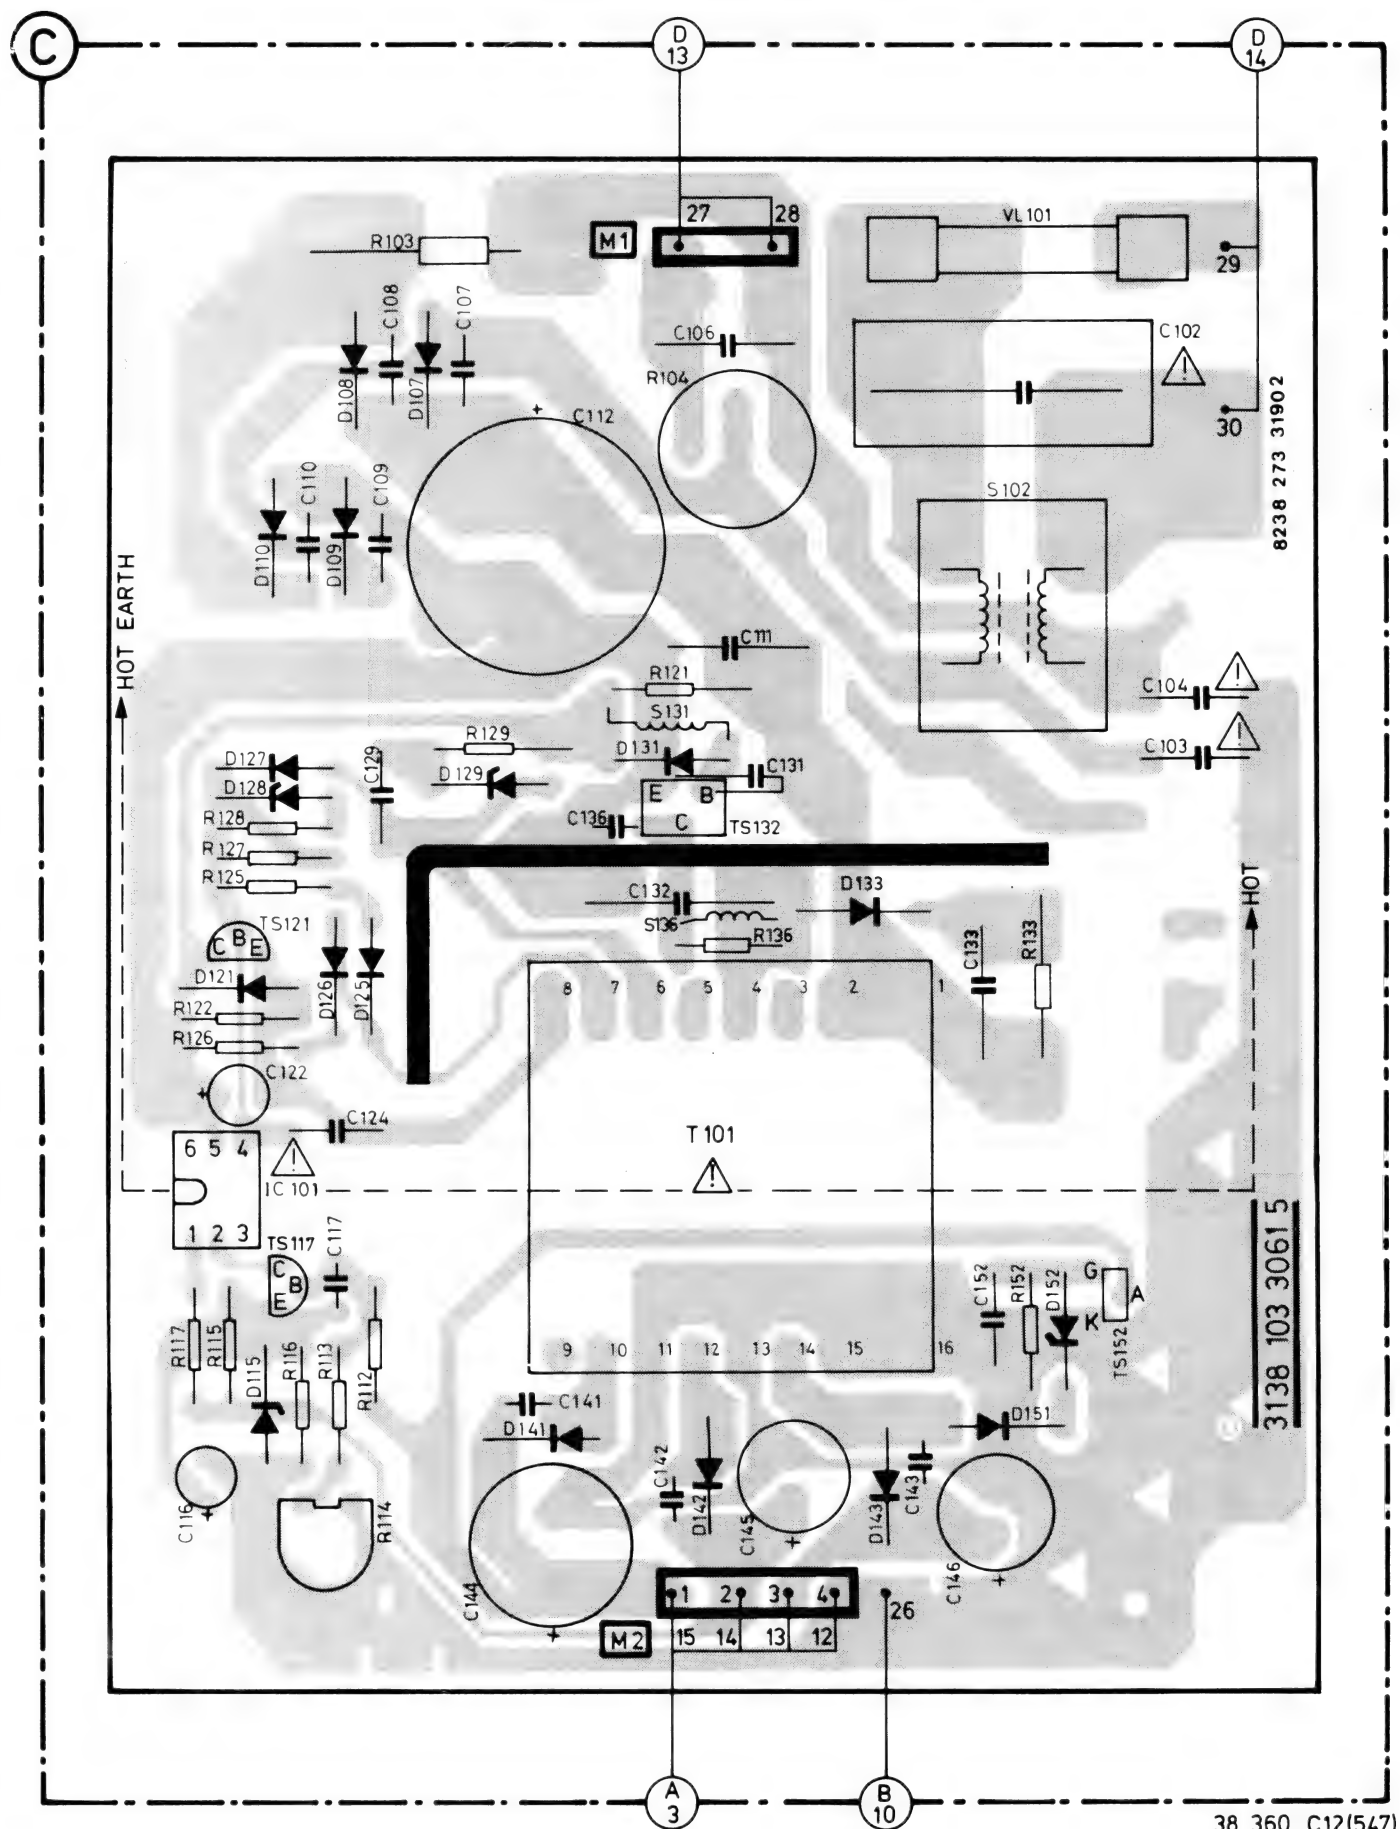
POWER SUPPLY P.C. BOARD (Early Production Version)  
(viewed from component side)






**8CM542/CM8562/CM8762 MAIN P.C. BOARD**  
(viewed from component side)

**NOTE: When IC501 has 16 Pin IC the following parts are not used; R550, R559, R561 & C568**

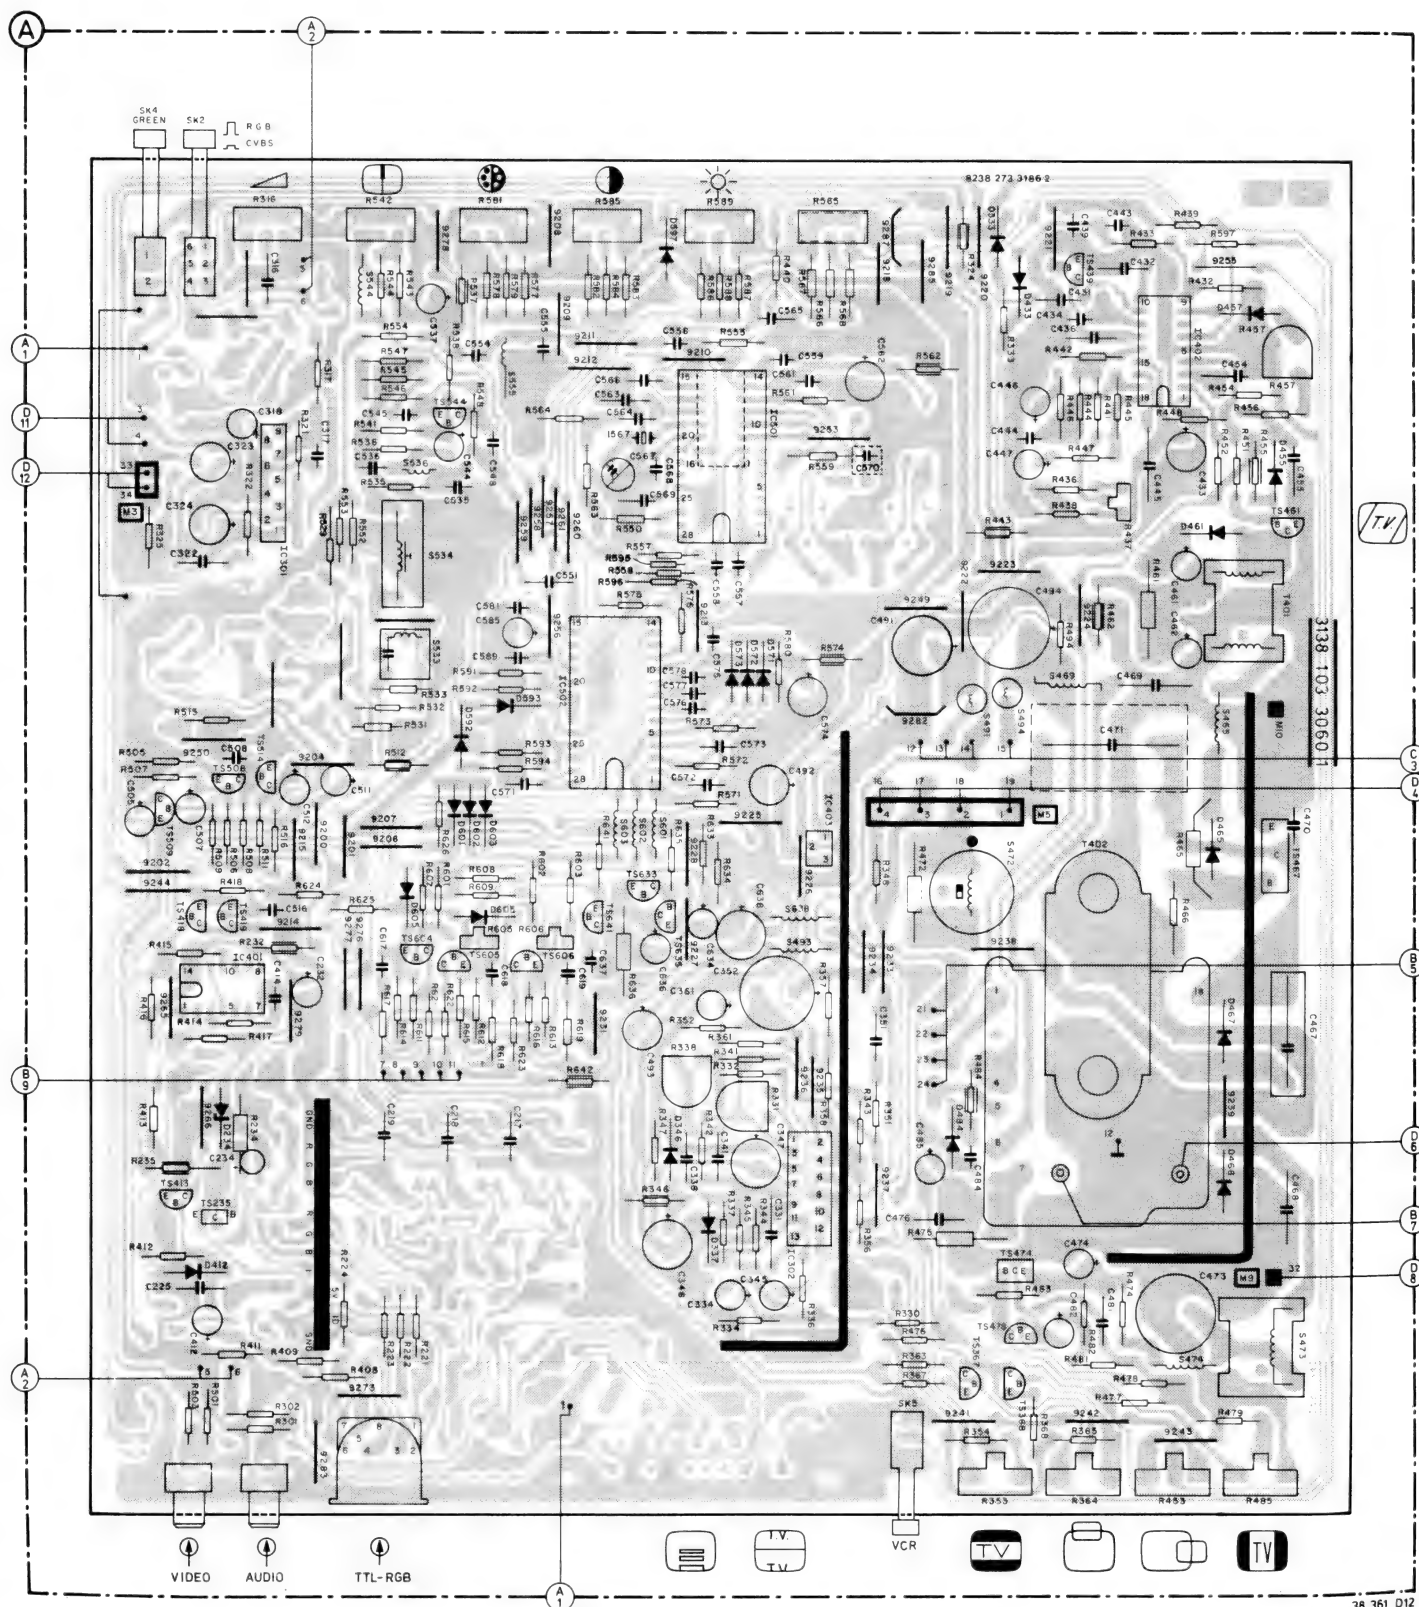



## IC501 ALTERNATE 16 PIN IC

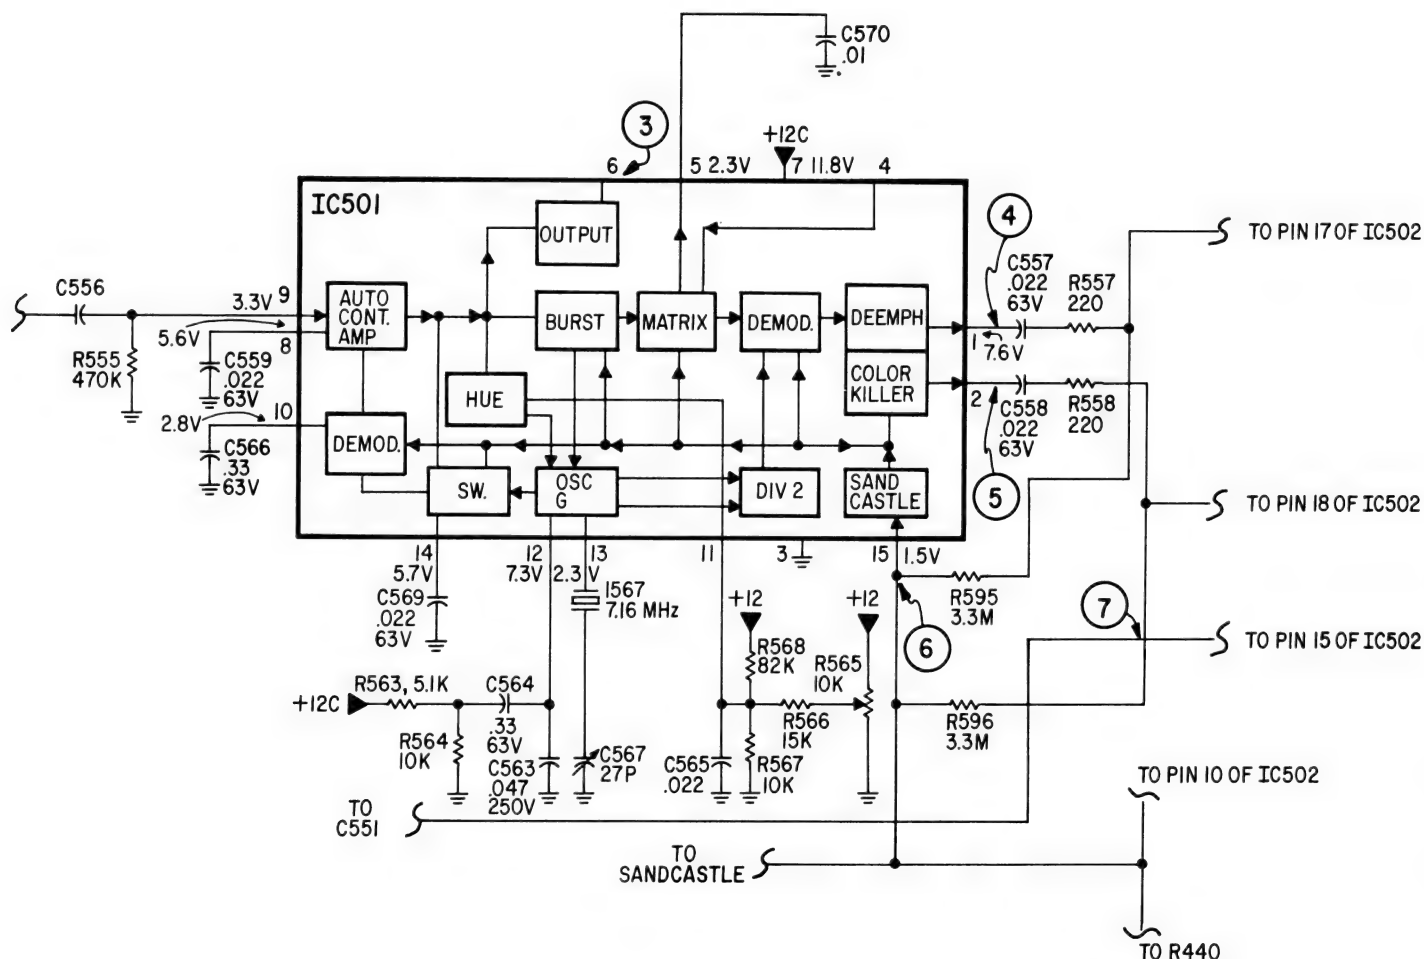SCHEMATIC NOTES  
UNLESS OTHERWISE SPECIFIED:

- ALL VOLTAGES AND WAVEFORMS TAKEN UNDER THE FOLLOWING CONDITIONS:  
- LINE VOLTAGE MAINTAINED AT 120VAC, 60Hz VIA AN ISOLATION TRANSFORMER.  
CUSTOMER CONTROLS SET AS FOLLOWS:  
- VOLUME CONTROL (R316) SET TO MINIMUM.  
- COLOR CONTROL (R581) SET FOR 8.75VDC WIPER TO GROUND.  
- CONTRAST CONTROL (R585) SET FOR 8.7VDC WIPER TO GROUND.  
- BRIGHTNESS CONTROL (R589) SET FOR 5VDC WIPER TO GROUND.  
- HUE CONTROL (R565) SET FOR 6VDC WIPER TO GROUND.  
- SK2 IN CVBS POSITION.  
- SK3, SK4 & SK5 OFF.

E.P. REFERS TO EARLY PRODUCTION  
L.P. REFERS TO LATE PRODUCTION

- VOLTAGES AND WAVEFORMS WERE TAKEN USING A 10 BAR GATED RAINBOW PATTERN SIGNAL SET TO DELIVER CHROMA BARS OF .5Vp-p AT THE VIDEO IN JACK.
- ALL VOLTAGES ARE POSITIVE DC WITH RESPECT TO GROUND. BE IT THE ISOLATED (SIGNAL) GROUND OR THE AC (HOT) GROUND WHICHEVER IS PRESENT IN THAT AREA OF CIRCUITRY.
- VOLTAGES MAY VARY DUE TO NORMAL PRODUCTION TOLERANCES. VOLTAGE SOURCES ARE ALSO NOMINAL.
- RESISTORS ARE ALL 5%, 1/4W, CARBON FILM EXCEPT FOR SOME UNIQUE PARTS. REFER TO REPLACEMENT PARTS LIST.
- CAPACITOR VALUES ARE IN MICROFARADS & PICO FARADS. REFER TO SCHEMATIC DIAGRAM FOR VALUES AND VOLTAGES EXCEPT FOR UNIQUE PARTS SHOWN IN REPLACEMENT PARTS LIST.

## WARNING

Critical components having special safety characteristics are identified with an S by the Ref. No. in the parts list and enclosed within a broken line\* along with the safety symbol ⚠ on the schematics or exploded views.

Use of substitute replacement parts which do not have the same specified safety characteristics may create shock, fire, or other hazards.

Under no circumstances should the original design be modified or altered without written permission from the N.A.P. Consumer Electronics Corp. NAPCEC assumes no liability, express or implied, arising out of any unauthorized modification of design. Servicer assumes all liability.

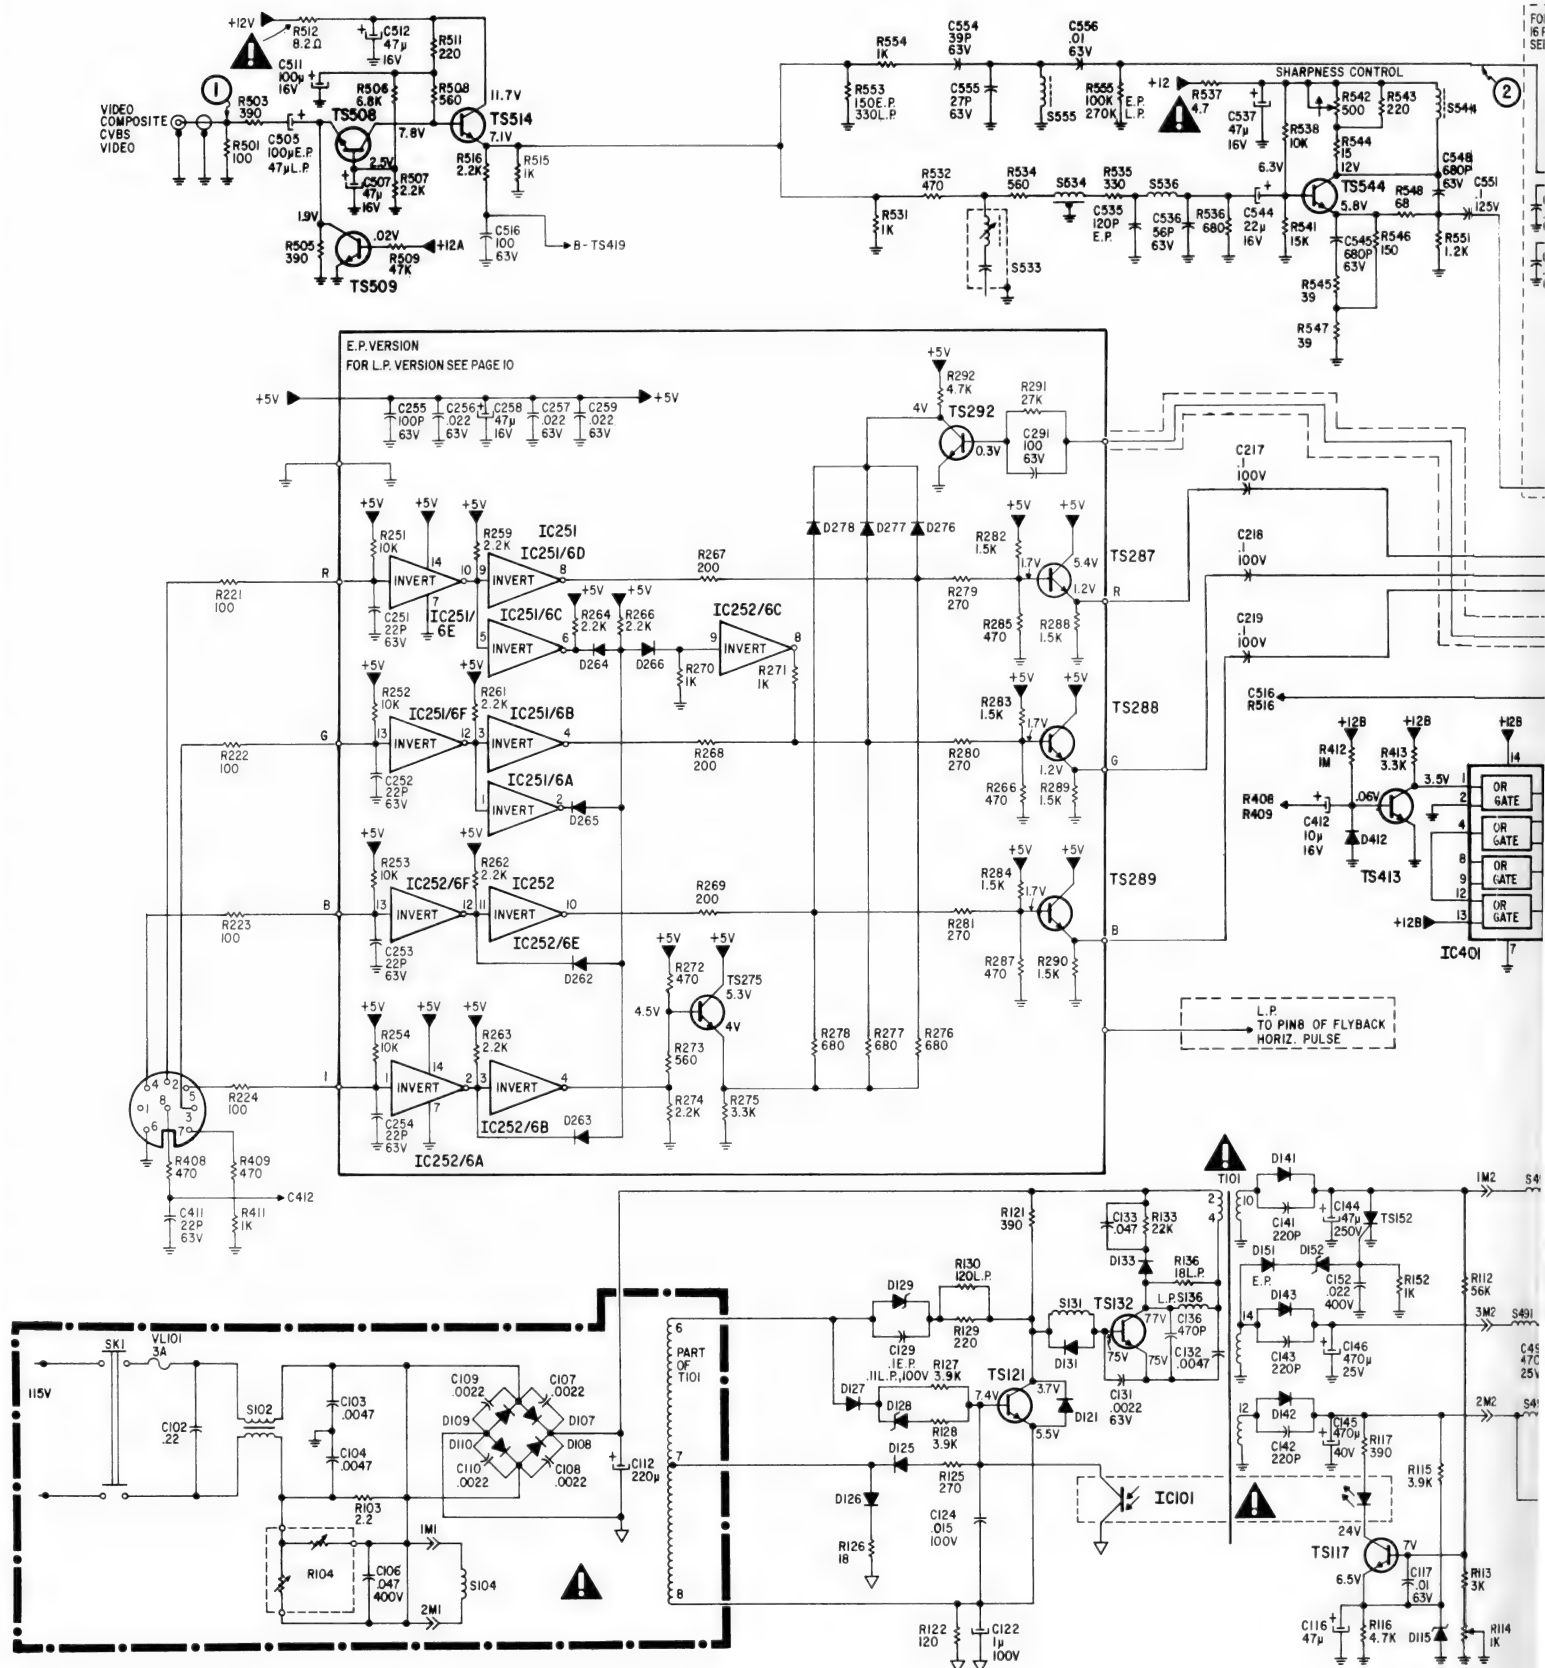
\* Broken line: — . — . — . — . — . — .



**CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING.**

▽ INDICATES "HOT" GROUND.


≡ INDICATES ISOLATED SIGNAL GROUND.






**NOTE: IC501 Alternate 16 Pin IC, See Insert Page 18**

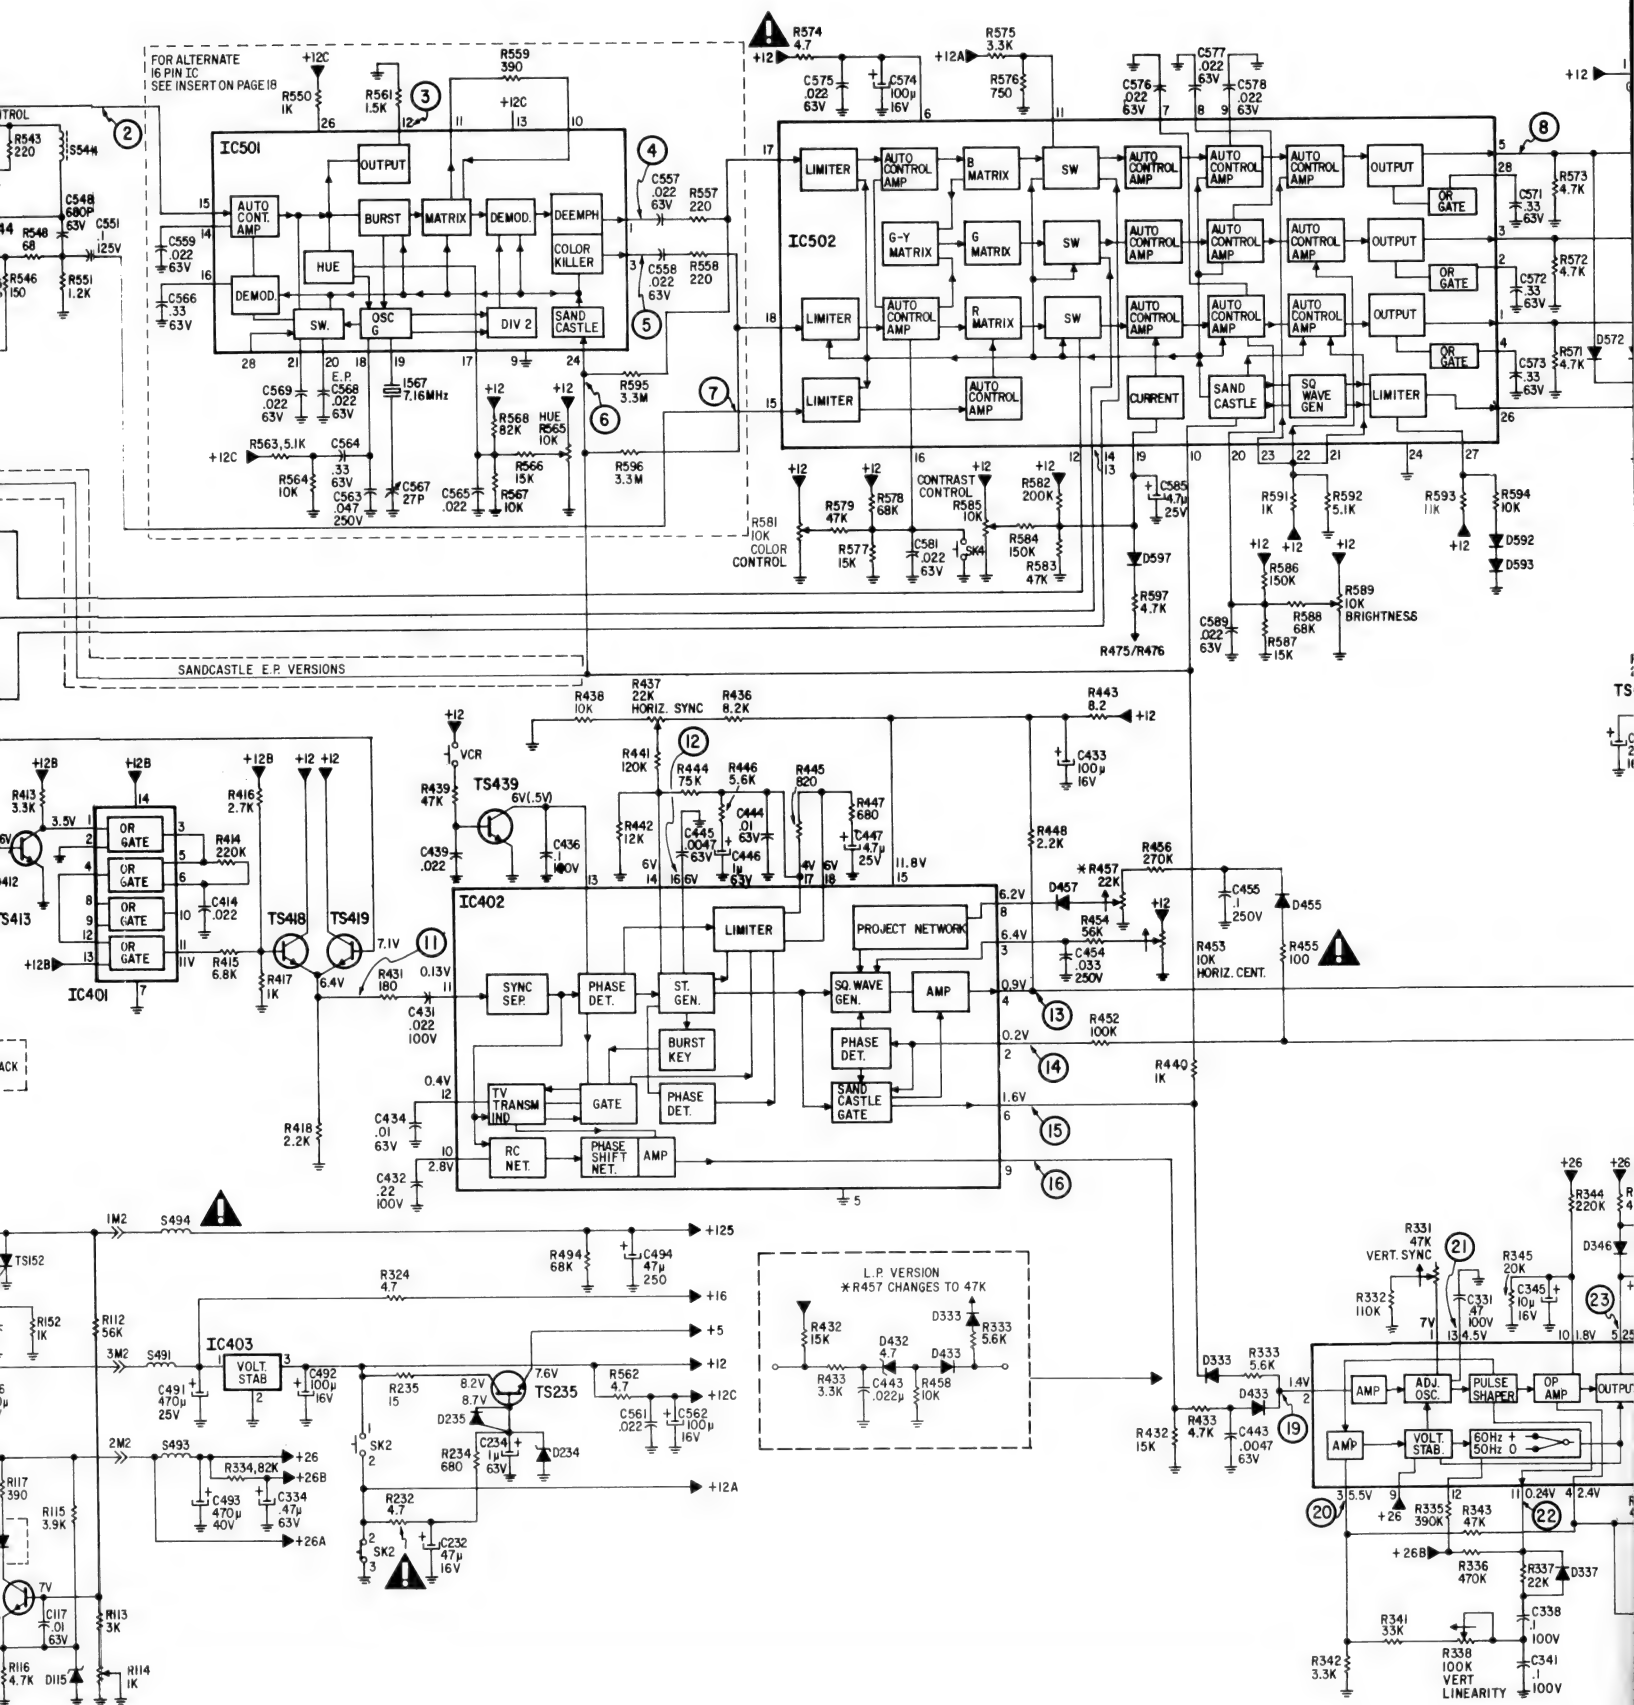**OUND.**






**REFERENCE 1084 P-S SCHEMATIC**

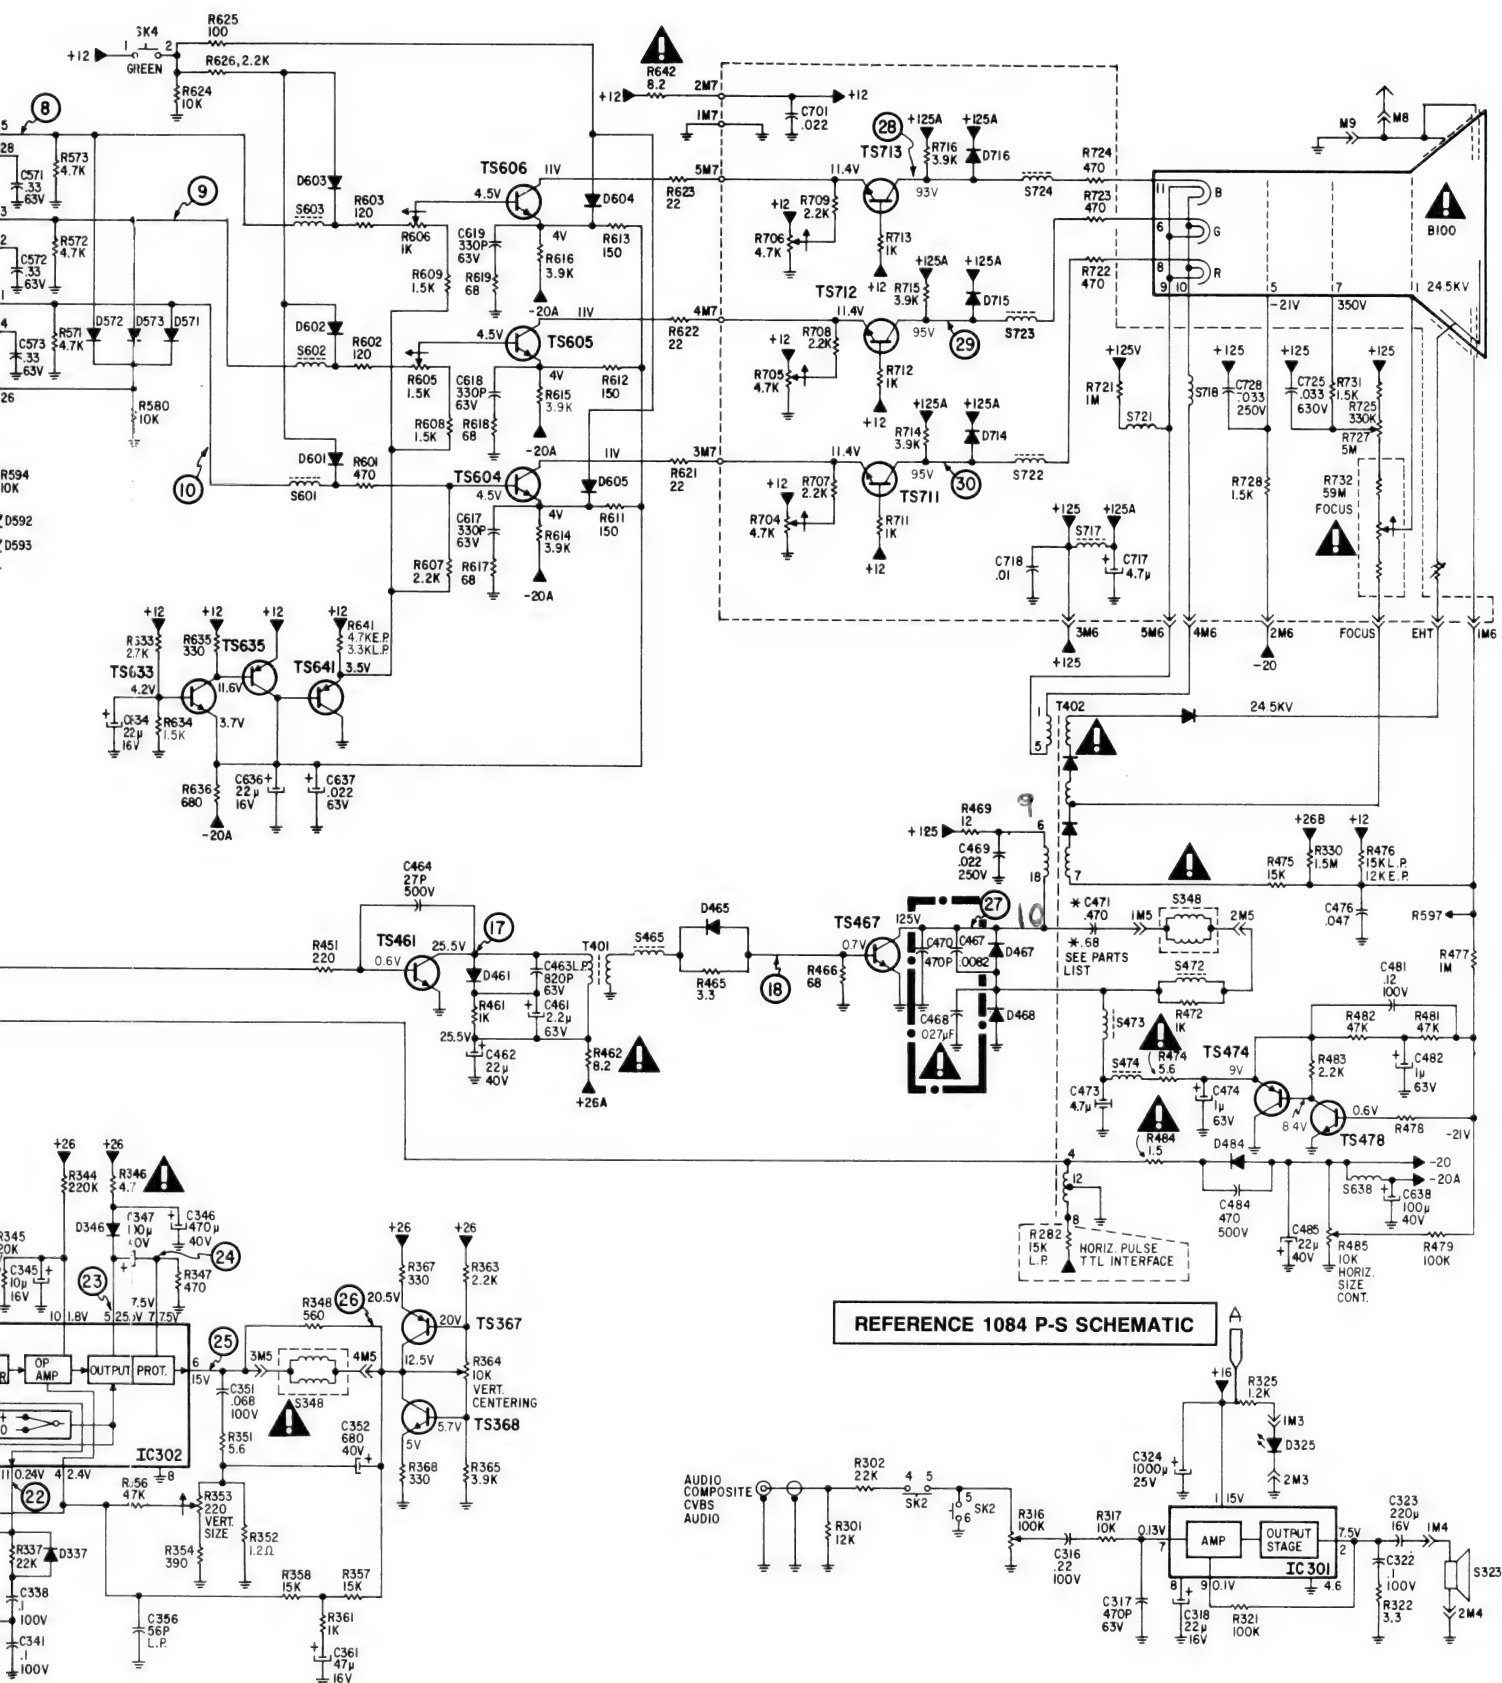




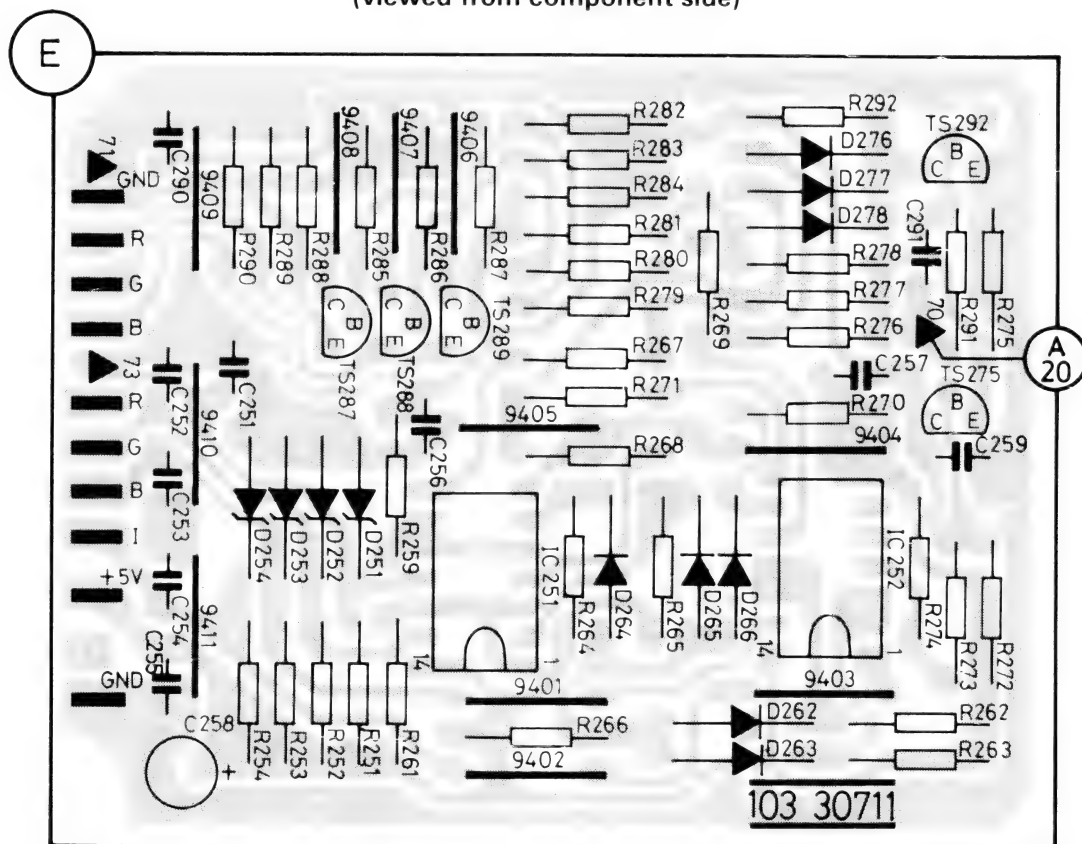**8CM542/CM8562/CM8762 RGB INTERFACE P.C. BOARD**  
(Early Production Version)  
(viewed from component side)



38 671 A12

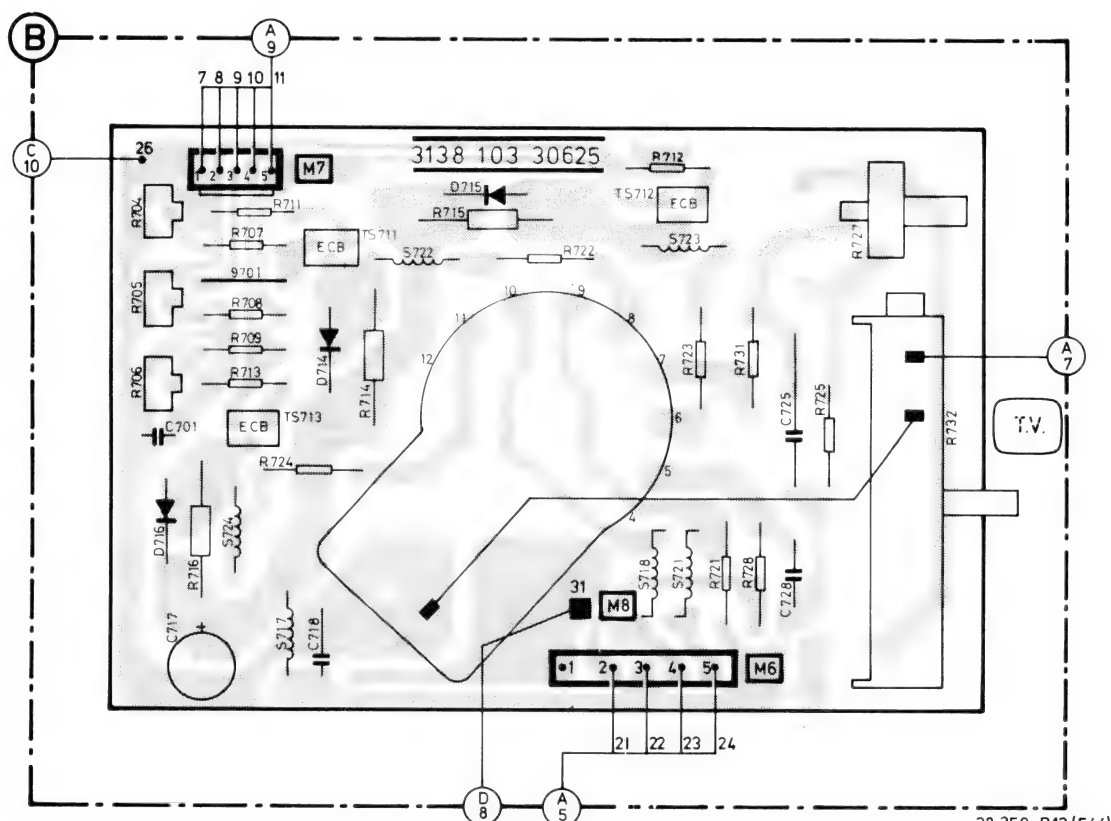**CRT P.C. BOARD**  
(viewed from component side)



38 359 B12(544)

(Schem. - F  
Critical co  
are identif  
enclosed v  
▲ on the

Use of sub  
same spec  
or other ha

CM

Ref.

COILS &amp; TRA

S S102

S S104

S S131

S S136

S S348

S S465

S S472

S S473

S S474

S S491

S S493

S S494

S S515

S S533

S S534

S S536

S S544

S S555

S S601

S S602

S S603

S S638

S S717

S S718

S S721

S S722

S S723

S S724

S T101

S T401

S T402

S 1515

CAPACITORS

S C102

S C103

S C104

S C106

S C107

S C108

S C109

S C110

S C111

S C112

S C132

S C136

S C141

S C142

S C143

S C443

S C467

S C468

S C470

S C471

S C471

S C473

S C508

S C535

S C554


S C555



# **ELECTRICAL REPLACEMENT PARTS LIST** **TO ENSURE OPTIMUM PERFORMANCE AND RELIABILITY** **ALWAYS USE GENUINE FACTORY REPLACEMENT PARTS**

## **WARNING**

(Schem. - Pgs. 11, 12, 13/19, 20, 21)

Critical components having special safety characteristics are identified with an S by the Ref. No. in the parts list and enclosed within a broken line\* along with the safety symbol  on the schematics or exploded views.

Use of substitute replacement parts which do not have the same specified safety characteristics may create shock, fire, or other hazards.

Under no circumstances should the original design be modified or altered without written permission from the N.A.P. Consumer Electronics Corp. NAPCEC assumes no liability, express or implied, arising out of any unauthorized modification of design. Servicer assumes all liability.

\* Broken line: — . — . — . — . — . — .

## **CM8505/CM8562/CM8705/CM8762/8CM505/8CM643/8CM515/8CM542** **REPLACEMENT PARTS LIST**

Ref.	Description	Part No.	Ref.	Description	Part No.
<b>COILS &amp; TRANSFORMERS</b>			<b>RESISTORS</b>		
S S102	Line Choke	3693400001	(unless otherwise specified, all are 5%, 1/4W, Metal Film, Flame Retardant)		
S S104	Degaussing Coil	3693100005	C718	.01uF., 500V, Ceramic	2509040919
S131	10uH Coil	3618271360	S R103	2.2 ohm, 7W, Wire Wound	2401440096
S136	2uH, Coil (L.P.)	5699000032	S R104	Dual PTC	4H11640035
S S348	Deflection Yoke	Part of CRT	R121	390k, Carbon Film	2302861029
S465	7.5uH Coil	3290000013	R133	22k, 2W, Metal Film	2301922235
S472	Coil	3618271363	S R232	4.7 ohm	4H11130499
S473	720uH Coil	3618271362	R235	15 ohm	2302681595
S474	Coil	3618271364	S R324	4.7 ohm	2302684785
S491	100uH Coil	3618271361	S R346	4.7 ohm	2302684785
S493	Coil	3618271358	R433	3.3k	2302823325
S494	100uH Coil	3618271361	R443	8.2 ohm	2302688285
S515	3.58MHz Coil (CM8505/CM8705/ 8CM505/8CM515/8CM643)	3618271369	R455	100 ohm	2302681015
S533	3.58MHz Coil	3618271342	R458	10k	2302821035
S534	Delay Line	1606770123	R461	1k, 2W, Metal Film	2394061025
S536	39uH Coil	3618271367	S R462	8.2 ohm	2302688285
S544	6.8uH Coil	3618271377	R465	3.3 ohm, 2W, Metal Film	2394063395
S555	27uH Coil	3618271379	R469	12 ohm, 5W, Wire Wound	2401440102
S601	2.2uH Coil	3618271378	R472	1k, 2W, Metal Film	2394061025
S602	2.2uH Coil	3618271378	S R474	5.6 ohm	2302685685
S603	2.2uH Coil	3618271378	R475	15k, 2W, Metal Film	2302861027
S638	120uH Coil	3618271358	S R484	1.5 ohm	2302861585
S717	8.2uH Coil	3618271366	S R512	8.2 ohm	2302688285
S718	10uH Coil	3618271360	S R537	4.7 ohm	2302684785
S721	10uH Coil	3618271360	S R562	4.7 ohm	2302684785
S722	4.7uH Coil	3618271359	S R574	4.7 ohm	2302684785
S723	4.7uH Coil	3618271359	R636	680 ohm, 2W, Metal Film	2394066815
S724	4.7uH Coil	3618271359	S R642	8.2 ohm	2302688285
S T101	Transformer	3090200003	R714	3.9k, 3W, Metal Film	2302861028
T401	Horizontal Drive Transformer	3293000001	R715	3.9k, 3W, Metal Film	2302861028
S T402	Output Transformer	3291000006	R716	3.9k, 3W, Metal Film	2302861028
1515	Delay Line (CM8505/CM8705/ 8CM505/CM515)	1606770121	R721	1M, 1/2W, Carbon Composition	2394041055
<b>CAPACITORS</b>			R722	470 ohm, 1/2W, Carbon Composition	2302124715
S C102	.22uF., 125VAC, Polyester Film	2602320550	R723	470 ohm, 1/2W, Carbon Composition	2302124715
S C103	.0047uF., 125VAC, Ceramic	2602320532	R724	470 ohm, 1/2W, Carbon Composition	2302124715
S C104	.0047uF., 125VAC, Ceramic	2602320532	R725	330k, 1/2W, Carbon Composition	2302123342
S C106	.047uF., 400V, Polyester Film	2506564739	R728	1.5k, 1/2W, Carbon Composition	2302641525
S C107	.0022uF., 1kV, Ceramic	2509041035	R731	1.5k, 1/2W, Carbon Composition	2302641525
S C108	.0022uF., 1kV, Ceramic	2509041035	<b>CONTROLS &amp; SWITCHES</b>		
S C109	.0022uF., 1kV, Ceramic	2509041035	C567	Trimmer Capacitor, 27pF.	2602320548
S C110	.0022uF., 1kV, Ceramic	2509041035	R114	Trimpot, 1k	2291010058
S C111	.22uF., 250V, Polyester Film (L.P.)	2506552249	R316	Volume Control, 100k	2204290729
S C112	.22uF., 50V, Electrolytic	2509040485	R331	Vertical Frequency Control, 47k	2291010053
C132	.0047uF., 630V, Polyester Film	2509040712	R338	Vertical Linearity Control, 100k	2291010060
C136	470pF., 2KV (E.P.)	2602320547	R353	Vertical Size Control, 220k	2204290761
C141	220pF., 500V, Ceramic	2602320546	R364	Vertical Centering Control, 10k	2291010086
C142	220pF., 500V, Ceramic	2602320546	R437	Horizontal Frequency Control, 22k	2204291040
C143	220pF., 500V, Ceramic	2602320546	R453	Horizontal Centering Control, 10k	2291010086
C443	.022uF., 50V	2602320529	R457	Trimpot, 22k (E.P.)	2204692232
S C467	.0082uF., 1.5kV, Polyester Film	2602320549	R457	Trimpot, 47k (L.P.)	2302124732
S C468	.022uF., 400V, Polypropylene	2602320597	R485	Horizontal Size Control, 10k	2291010086
S C470	470pF., Ceramic	2602320547	R496	Pin Cushion, 4.7k (8CM643)	2291010052
C471	.47uF., 250V, Polyester Film	2602320551	R523	Trimpot, 330 ohm (CM8505/ CM8705/8CM515/8CM515/ 8CM643)	2204290732
C471	.68uF., 10%, 250V, Polyester Film (CM8505/CM8705/8CM505)	2509040718	R542	Sharpness Control, 500 ohm	2204290727
C473	4.7uF., 50V, Bipolar	2701740675	R565	Trimpot, 10k	2204290728
C508	56pF., 2%, 100V, Ceramic (CM8505/CM8705/8CM505/ 8CM515/8CM643)	2602320544	R581	Color Control, 10k	2204290728
C535	120pF., 50V, Ceramic	2602320552	R585	Contrast Control, 10k	2204290728
C554	39pF., 5%, 50V, Ceramic	2509041033	R589	Brightness Control, 10k	2204290728
C555	27pF., 5%, 50V, Ceramic	2509041032	R598	Sub Brightness, 10k (8CM643)	2203011032
			R605	Trimpot, 1k	2204290725
			R606	Trimpot, 1k	2204290725
			R704	Trimpot, 4.7k	2291010052
			R705	Trimpot, 4.7k	2291010052



Ref.	Description	Part No.
<b>CONTROLS &amp; SWITCHES (Continued)</b>		
R706	Trimpot, 4.7k	4H10010236
R727	Potentiometer, 5M	2204290726
S R732	Focus Control, 59M	2204290730
S SK1	Power Switch	1606780548
SK2	RGB/CVBS Switch	1606780549
SK3	Comb Filter Switch (CM8505/ CM8705/8CM505/8CM515)	1606780549
SK4	Green Switch	1606780549
SK5	VCR Switch	1606780549
<b>SEMICONDUCTORS</b>		
S IC101	Optic Coupler IC	5303110001
IC251	Inverter IC (CM8562)	6193100140
IC252	Inverter IC (CM8562)	6193100140
IC271	Inverter IC (CM8505/CM8705/ 8CM505/8CM515/8CM643)	6121970001
IC272	Decoder/Matrix IC (CM8505/CM8705/8CM505/ 8CM515/8CM643)	6193100070
IC273	AND Gate IC (CM8505/8CM505/ 8CM515/8CM643)	6121990001
IC301	Audio Amp IC	6192001060
IC302	Vertical Signal Processor IC	6123300289
IC401	Exclusive OR Gate IC	6122890001
IC402	Horizontal Signal Processor IC	6123300330
IC403	Voltage Stabilizer IC	6192140331
IC501	Video Processor IC (28 Pin)	6123300332
IC501	Video Processor IC (16 Pin)	6123300374
IC502	Video Processor/Video Amp IC	6192080240
TS117	NPN, Silicon	6105000004
TS121	NPN, Silicon	6190004040
TS132	NPN, Silicon	6190002200
TS152	Thyristor	6191400010
TS211	NPN, Silicon (CM8505/CM8705/ 8CM505/8CM515/8CM643)	6103700001
TS212	NPN, Silicon (CM8505/CM8705/ 8CM505/8CM515/8CM643)	6103700001
TS213	NPN, Silicon (CM8505/CM8705/ 8CM505/8CM515/8CM643)	6103700001
TS217	NPN, Silicon (CM8505/CM8705/ 8CM505/8CM515/8CM643)	6103700001
TS218	NPN, Silicon (CM8505/CM8705/ 8CM505/8CM515/8CM643)	6103700001
TS219	NPN, Silicon (CM8505/CM8705/ 8CM505/8CM515/8CM643)	6103700001
TS228	NPN, Silicon (CM8505/CM8705/ 8CM505/8CM515/8CM643)	6103700001
TS233	PNP, Silicon (CM8505/CM8705/ 8CM505/8CM515/8CM643)	6190101480
TS235	NPN, Silicon	6190004860
TS275	NPN, Silicon (CM8562/CM8762/ 8CM542)	6104350002
TS287	NPN, Silicon (CM8562/CM8762/ 8CM542)	6103700001
TS288	NPN, Silicon (CM8562/CM8762/ 8CM542)	6103700001
TS289	NPN, Silicon (CM8562/CM8762/ 8CM542)	6103700001
TS291	NPN, Silicon (CM8505/CM8705/ 8CM505/8CM515/8CM643)	6103700001
TS292	NPN, Silicon (CM8505/CM8705/ 8CM505/8CM515/8CM643)	6104350002
TS293	NPN, Silicon (CM8505/CM8705/ 8CM505/8CM515/8CM643)	6103700001
TS298	NPN, Silicon (CM8505/CM8705/ 8CM505/8CM515/8CM643)	6103700001
TS299	NPN, Silicon (CM8505/CM8705/ 8CM505/8CM515/8CM643)	6104350002
TS367	PNP, Silicon	6190101480
TS368	NPN, Silicon	6103680002
TS406	NPN, Silicon (CM8505/CM8705/ 8CM505/8CM515/8CM643)	6104350002
TS413	NPN, Silicon	6104350002
TS418	NPN, Silicon	6103700001
TS419	NPN, Silicon	6103700001
TS439	NPN, Silicon	6104350002
TS461	NPN, Silicon	6105350003
TS467	NPN, Silicon	6104330001
TS474	PNP, Silicon	6104380001
TS478	NPN, Silicon	6104350002
TS508	NPN, Silicon	6103700001
TS509	NPN, Silicon	6104350002
TS514	NPN, Silicon	6103700001
TS517	NPN, Silicon (CM8505/CM8705/ 8CM505/8CM515/8CM643)	6103700001
TS518	NPN, Silicon (CM8505/CM8705/ 8CM505/8CM515/8CM643)	6103700001

**SEMICONDUCTORS (Continued)**

Ref.	Description	Part No.
TS531	NPN, Silicon (CM8505/CM8706/ 8CM505/8CM515/8CM643)	6103700001
TS544	NPN, Silicon	6103700001
TS552	NPN, Silicon (CM8505/CM8705/ 8CM505/8CM515/8CM643)	6103700001
TS604	NPN, Silicon (CM8505/CM8705/ 8CM505)	6103700001
TS604	NPN, Silicon (8CM515/CM8562/ CM8762/8CM542)	4H13041594
TS605	NPN, Silicon (CM8505/CM8705/ 8CM505)	6103700001
TS605	NPN, Silicon (8CM515/CM8562/ CM8762/8CM542)	4H13041594
TS606	NPN, Silicon (CM8505/CM8705/ 8CM505)	6103700001
TS606	NPN, Silicon (8CM515/CM8562/ CM8762/8CM542)	4H13041594
TS633	NPN, Silicon	6104350002
TS635	NPN, Silicon	6105270002
TS641	NPN, Silicon	6103720002
TS711	NPN, Silicon	6104390001
TS712	NPN, Silicon	6104390001
TS713	NPN, Silicon	6104390001
S D107	Diode	5391200341
S D108	Diode	5391200341
S D109	Diode	5391200341
S D110	Diode	5391200341
D111	Diode (L.P.)	5302250240
D115	Zener Diode	5301570629
D121	Diode	5301811002
D125	Diode	5301811002
D126	Diode	5301811001
D127	Diode	5301811001
D128	Zener Diode	4H13030862
D129	Zener Diode, 2.4V	4H13031253
D131	Diode	5301811002
D133	Diode	4H13031393
D141	Diode	4H13032833
D142	Diode	4H13031607
D143	Diode	5H13031971
D151	Diode	5302681002
D152	Diode	4H13031024
D221	Diode (CM8505/CM8705/ 8CM505/8CM515/8CM643)	5301811002
D222	Diode (CM8505/CM8705/ 8CM505/8CM515/8CM643)	5301811002
D223	Diode (CM8505/CM8705/ 8CM505/8CM515/8CM643)	5301811002
D234	Zener Diode	4H13034167
D262	Diode (CM8562/CM8762/ 8CM542)	5801811002
D263	Diode (CM8562/CM8762/ 8CM542)	5801811002
D264	Diode (CM8562/CM8762/ 8CM542)	5801811002
D265	Diode (CM8562/CM8762/ 8CM542)	5801811002
D266	Diode (CM8562/CM8762/ 8CM542)	5801811002
D276	Diode (CM8562/CM8762/ 8CM542)	5801811002
D277	Diode (CM8562/CM8762/ 8CM542)	5801811002
D278	Diode (CM8562/CM8762/ 8CM542)	5801811002
D325	Green LED	5392100470
D333	Diode	5301811002
D337	Diode	5301811002
D346	Diode	5301711002
D412	Diode	5301811002
D432	Zener Diode, 4.7V	5390150479
D433	Diode	5301811002
D455	Diode	5302681002
D457	Diode	5301811002
D461	Diode	4H13031607
D465	Diode	4H13031607
D467	Diode	5302591001
D468	Diode	5302601002



Ref.	Description	Part No.	Ref.	Description	Part No.
SEMICONDUCTORS (Continued)			MISCELLANEOUS (Continued)		
D484	Diode	5391500450		Cabinet Foot, 4 used (CM8505/ CM8562)	1491030002
D571	Diode	5301811002		Cabinet Foot, 4 used (8CM505/ 8CM515/8CM643)	1491030003
D572	Diode	5301811002		Cover Adjustment (8CM542)	1491320214
D573	Diode	5301811002		Secondary Control Door (CM8505)	1492180011
D592	Diode	5301811002		Secondary Control Door (8CM505)	1492180010
D593	Diode	5301811002		Secondary Control Door (8CM515/ 8CM643)	1492180012
D597	Diode	5301811002		Secondary Control Door (CM8562)	1492180018
D601	Diode	5301811002		Text Plate (CM8505/CM8562)	1591060003
D602	Diode	5301811002		Text Plate (8CM505/8CM515)	1591060004
D603	Diode	5301811002		On/Off Pushbutton Knob (CM8505/CM8705)	1494200066
D604	Diode	5301811002		On/Off Pushbutton Knob (8CM505/8CM515/8CM643)	1494200074
D605	Diode	5301811002		On/Off Pushbutton Knob (CM8562/CM8762/8CM542)	1494200074
D714	Diode	5302681002		Pushbutton Knob (VCR SW., Comb Defeat (2 used)	1494200067
D715	Diode	5302681002		Pushbutton Knob (RGB/CVBS, Green (2 used)	1494200068
D716	Diode	5302681002		High Voltage Cable (CM8505/ CM8705/8CM505/8CM515/ 8CM643)	4613990214
MISCELLANEOUS				High Voltage Cable (CM8562/ CM8762/8CM542)	4613990221
S L101	Fuse, 3A	1813900214		Focus Cable	4613990213
S	Fuse Holder (2 used)	1035300932		Control Extender Rod (4 used)	1191000039
S B100	CRT w/Deflection Yoke (CM8505/CM8705)	A34EAJ00X		Owner's Manual (CM8505)	IB47290001
S B100	CRT w/Deflection Yoke (8CM505)	A34EAJ10X		Owner's Manual (8CM505)	IB47540001
S B100	CRT w/Deflection Yoke (8CM515)	M34EAQ00X		Owner's Manual (8CM515)	IB47550001
S B100	CRT w/Deflection Yoke (8CM542/8CM643)	E2971B55		Owner's Manual (8CM643)	IB50090001
S B100	CRT w/Deflection Yoke (CM8562/CM8762)	M34EAQ10X		Owner's Manual (CM8705)	IB53160001
S	CRT Socket	1892250011		Owner's Manual (CM8762)	IB53150001
S323	Speaker	5808350051		Owner's Manual (CM8562)	IB48180001
1567	Crystal	5699000028		Owner's Manual (8CM542)	IB52560001
	RCA Jack (2 used)	1813930160			
	6 Pin DIN Socket (CM8505/ CM8705/8CM505/8CM515/ 8CM643)	1814521073			
	8 Pin DIN Socket	1814521072			
	Cabinet (CM8505)	1492100002			
	Cabinet (8CM505)	1492100003			
	Cabinet (8CM515, 8CM643)	1492100004			
	Cabinet (8CM542)	1492900004			
	Cabinet (CM8562)	1492100005			



Many electrical and mechanical parts in NAPCEC television sets have special safety-related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. The use of a substitute part which does not have the same safety characteristics as the NAPCEC recommended replacement part shown in this service manual may create shock, fire or other hazards.



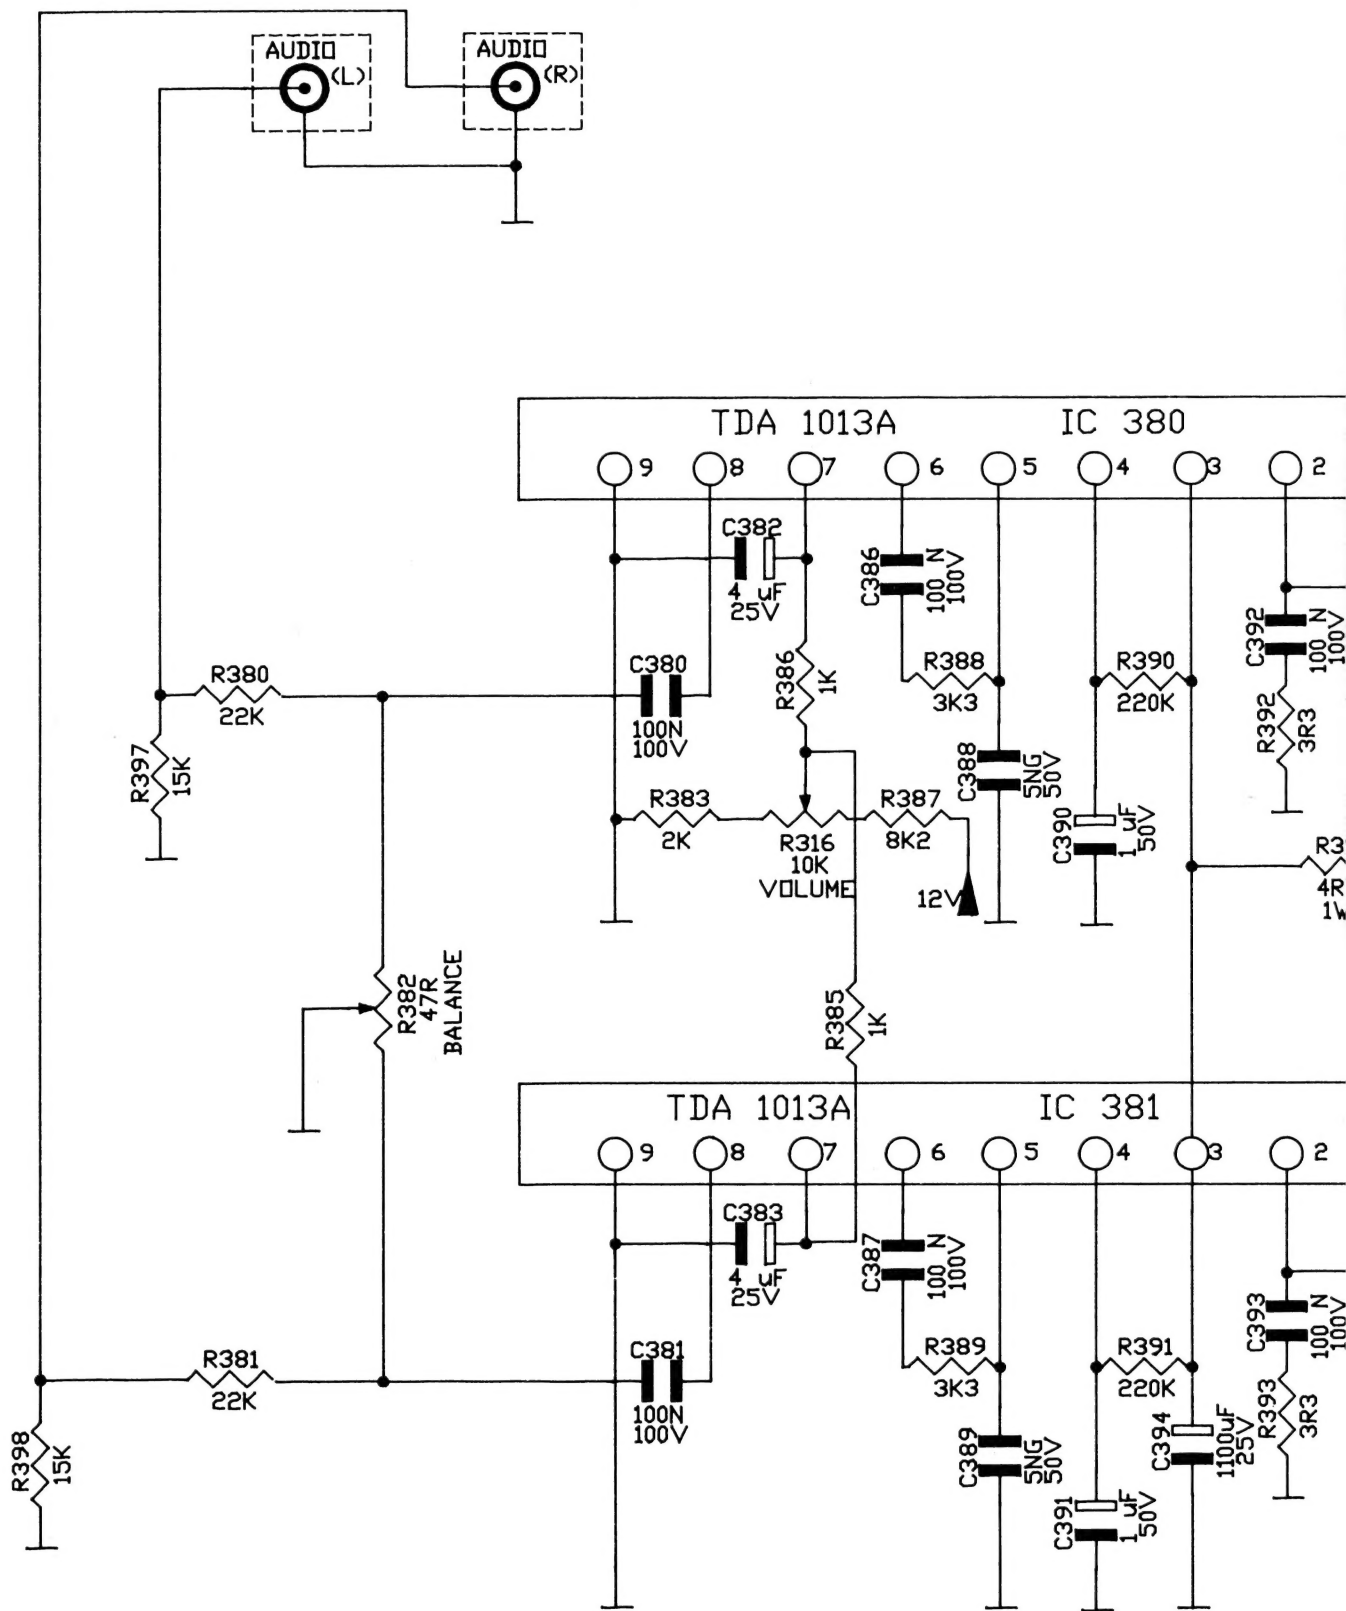
# COMMODORE STOCKED PARTS — 1084P

CBM PART NUMBER	DESCRIPTION	LOCATION	PHILIPS OEM NUMBER
314890-01	SERVICE MANUAL 1084		
314851-01	CABLE 1084 (6 to 23)		
610200-11	LINE CHOKE	S102	3693400001
610200-12	DEGAUSSING COIL	S104	3693100005
610200-13	DEFLECTION YOKE (PART OF CRT)	S348	—
610200-14	TRANSFORMER	T101	3090200003
610200-15	HORZ DRIVE TRANSFORMER	T401	3293000001
610200-16	OUTPUT TRANSFORMER	T402	3291000006
610200-17	CAP .0082 $\mu$ F, 1.5KV POLY FILM	C467	2602320549
610200-18	CAP .022 $\mu$ F, 400V POLYPROP	C468	2602320597
610200-19	DUAL PTC	R104	4H11640035
610200-20	FOCUS CONTROL, 59M	R732	2204290730
610200-21	POWER SWITCH	SK1	1606780548
610200-22	IC OPTIC COUPLER	IC101	5303110001
610200-23	IC AUDIO AMP	IC301	6123300289
610200-24	IC VERT SIGNAL PROCESSOR	IC302	6123300289
610200-25	IC HORZ SIGNAL PROCESSOR	IC402	6123300330
610200-26	IC VIDEO PROCESSOR (28 PIN)	IC501	6123300332
610200-27	IC VIDEO AMP	IC502	6192080240
610200-28	TRANSISTOR NPN TS461	TS461	6105350003
610200-29	TRANSISTOR NPN TS467	TS467	6104330001
610200-30	TRANSISTOR NPN TS711, 712, 713	TS711	6104390001
610200-31	DIODE D107, 108, 109, 110	D107	5391200341
610200-32	CRT WITH DEFLECTION YOKE	B100	M34EAQ10X
610200-33	CRT SOCKET	—	1892250011
610200-34	CABINET (CM8562)	—	1492100005
610200-35	CONTROL PANEL DOOR	—	1492180018

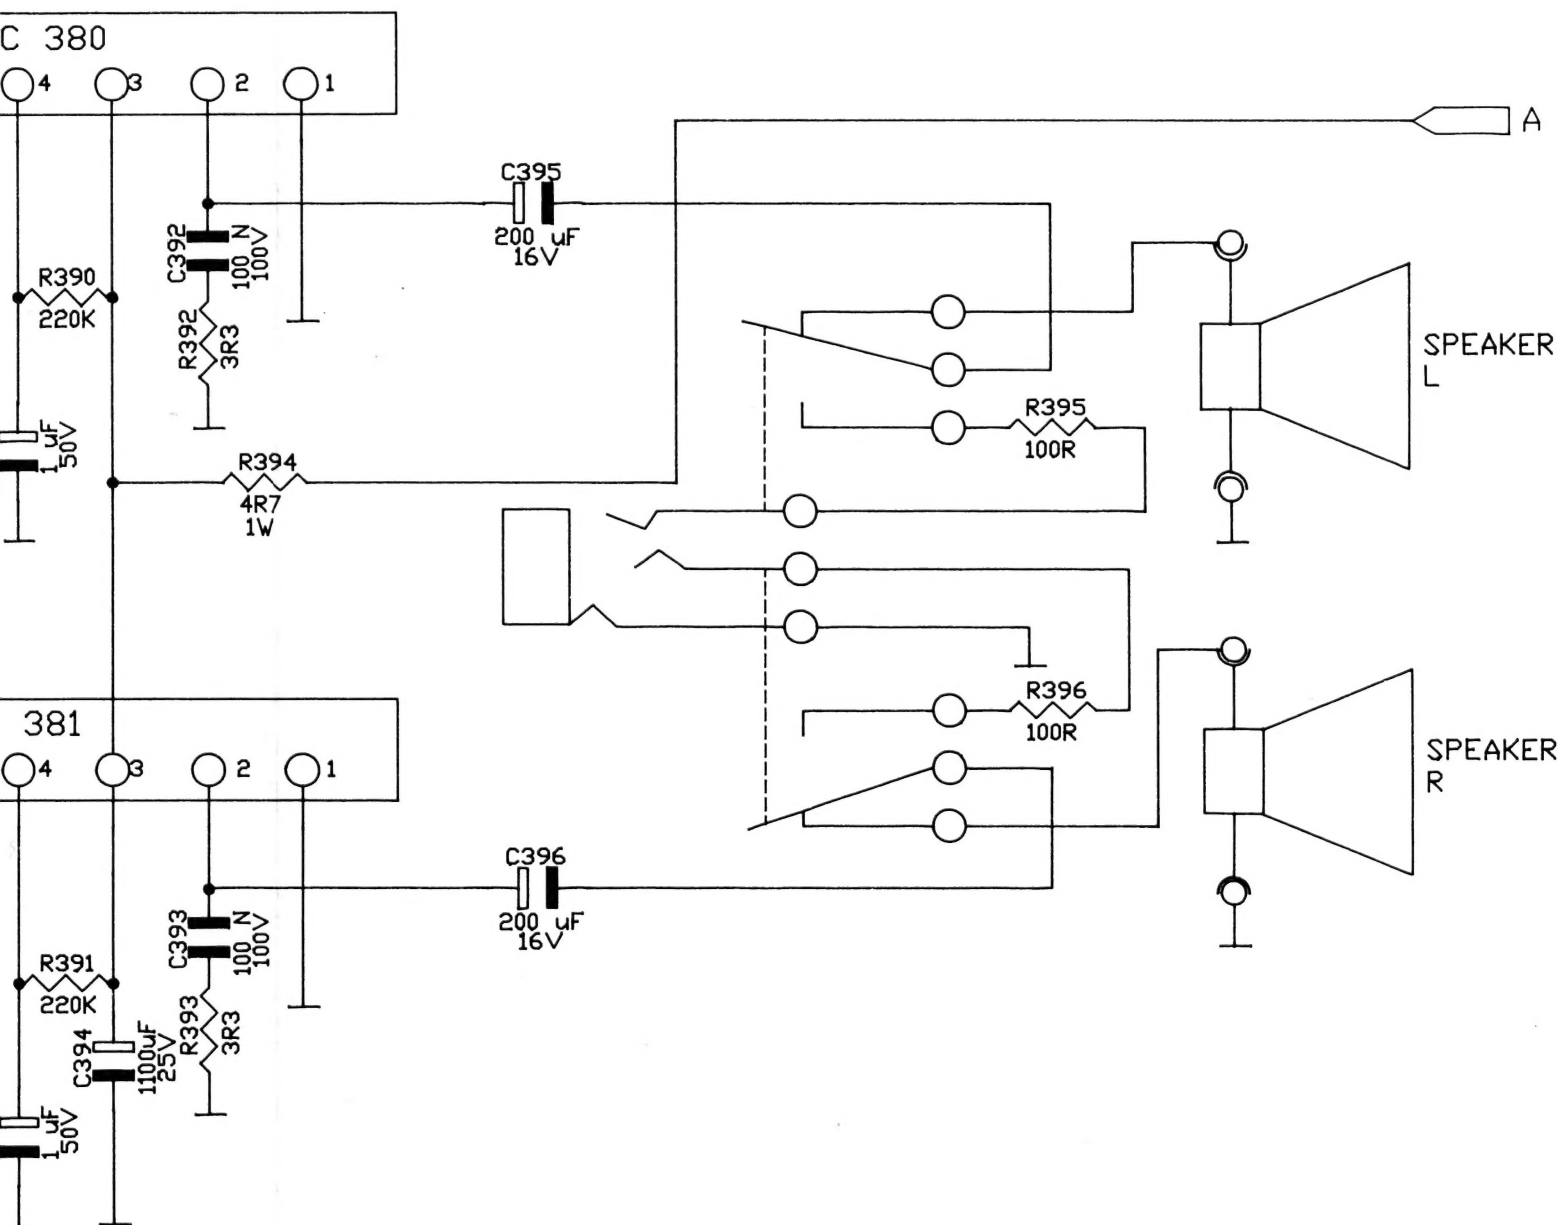


# ILIPS OEM NUMBER

93400001  
 93100005  
 —  
 90200003  
 93000001  
 91000006  
 02320549  
 02320597  
 11640035  
 04290730  
 06780548  
 03110001  
 23300289  
 23300289  
 23300330  
 23300332  
 92080240  
 05350003  
 04330001  
 04390001  
 91200341  
 34EAQ10X  
 92250011  
 92100005  
 92180018







**1084 P-S  
SCHEMATIC**





Computer Systems Division  
1200 Wilson Drive  
West Chester, PA 19380